


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

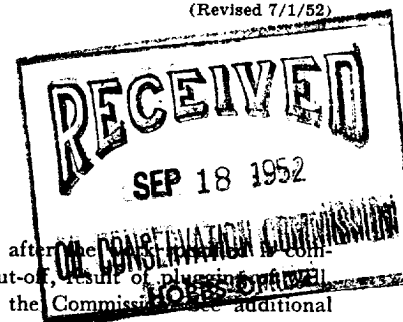

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the operation is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

September 16, 1952

(Date)

Monument, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Amerada Petroleum Corporation

(Company or Operator)

Allie M Lee

(Lease)

McVay & Stafford Drilling Company

(Contractor)

Well No. 1 in the C/NE/4 SE/4 of Sec. 23

T. 11-S, R. 32-E, NMPM, Moore-Devonian Pool, Lea County.

September 16, 1952

The Dates of this work were as follows:

Notice of intention to do the work ~~was~~ (was not) submitted on Form C-102 on _____, 19____,

(Cross out incorrect words)

and approval of the proposed plan ~~was~~ (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

10685' T.D. 10681' DOD - Lime - Finished drilling 6-3/4" hole @ 10:30 PM, 9/9/52. Ran Schlumberger's Electrical, Gamma Ray & Microlog surveys. Ran 221 Jts 5 1/2" Casing (as liner) set @ 10684' with top of liner hanger at 3382'. Cemented W/600 Sx Sls-Set Cement mixed 3% Jel and 1/4# Flocele per sack. Max Pressure 2500#. Plug pumped to 10170' at 12:55 PM, 9/12/52 - After WOC for 24 hours, set Baker Retrivable Retainer @ 3257' and squeezed top of 5 1/2" liner with 100 sacks regular cement. Ran Temperature survey before squeezing top of 5 1/2" liner - Top of cement outside 5 1/2" casing @ 5152' or 72.8% fill - Drilled out cement from 3332' to 3382' & tested @ 3382' with 1000# - no pressure drop. Drilled 10170' to 10681' and tested 5 1/2" casing with 1000# for 1/2 hour - no pressure drop. Continued with completion operations -

Witnessed by R. J. Brakey

(Name)

Amerada Petroleum Corporation

(Company)

Farm Boss -

(Title)

Approved:

OIL CONSERVATION COMMISSION

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name

Position Assistant District Superintendent

Representing Amerada Petroleum Corporation

Address Drawer D, Monument, New Mexico

(Title)

(Date)