


DUPLICATE

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS NOTICES

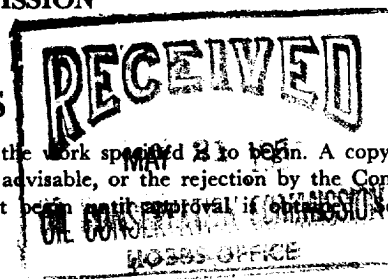

Submit this notice in TRIPLICATE to the District Office, Oil Conservation Commission, before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Notice by Checking Below

NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO TEMPORARILY ABANDON WELL		NOTICE OF INTENTION TO DRILL DEEPER	
NOTICE OF INTENTION TO PLUG WELL	<input checked="" type="checkbox"/>	NOTICE OF INTENTION TO PLUG BACK		NOTICE OF INTENTION TO SET LINER	
NOTICE OF INTENTION TO SQUEEZE		NOTICE OF INTENTION TO ACIDIZE		NOTICE OF INTENTION TO SHOOT (Nitro)	
NOTICE OF INTENTION TO GUN PERFORATE		NOTICE OF INTENTION (OTHER)		NOTICE OF INTENTION (OTHER)	

OIL CONSERVATION COMMISSION  
SANTA FE, NEW MEXICO

Hobbs, New Mexico

May 21, 1953

(Place)

(Date)

Gentlemen:

Powhatan-Carter

Following is a Notice of Intention to do certain work as described below at the.....

Gulf Oil Corporation

Well No. 1 in (Unit)

SW NE (Company or Operator) 24 11-S 32-E Moore-Devonian  
 1/4 Subdivision 1/4 of Sec. T. R. NMPM. Pool  
 County.

### FULL DETAILS OF PROPOSED PLAN OF WORK

(FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS)

## TD 10,403' Proposed plugging procedure:

Spot heavy mud-laden fluid from 10403' to 9100';  
 Spot 35-sack cement plug from 9100' to 9000';  
 Spot heavy mud-laden fluid from 9000' to 8280';  
 Spot 65-sack cement plug from 8280' to 8080';  
 Spot heavy mud-laden fluid from 8080' to 5800';  
 Spot 20-sack cement plug from 5500' to 5450';  
 Spot heavy mud laden fluid from 5450' to 4700';  
 Spot 20-sack cement plug from 4700' to 4650';  
 Spot heavy mud-laden fluid from 4650' to 3600';  
 Spot 40-sack cement plug from 3600' to 3500' to give 62' of cement in 8-5/8" casing and 38' of cement in open hole;  
 Spot heavy mud-laden fluid from 3500' to 50';  
 Spot 17-sack cement plug from 50' to surface. Place 4" packer to extend 4' above ground level.

Approved....., 19.....  
 Except as follows:

Gulf Oil Corporation

Company or Operator

By.....

Asst. Area Prod. Supt.

Position.....  
Send Communications regarding well to:Approved  
OIL CONSERVATION COMMISSION

By.....

Title.....

Name Gulf Oil Corporation  
 Address Box 2167, Hobbs, New Mexico