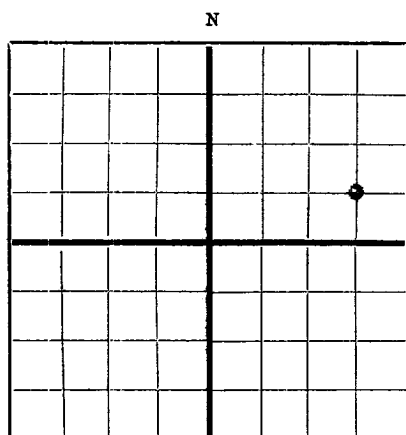


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Amerada Petroleum Corporation Box 2040, Tulsa 2, Oklahoma
Company or Operator Address
State SCB Well No. 1 in SE 1/4 of Sec. 5, T. 12S
Lease
R. 32E, N. M. P. M., Caprock Field, Lea County.
Well is 1980 feet south of the North line and 660 feet west of the East line of Sec. #5-12S-32E.
If State land the oil and gas lease is No. E-1349 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Amerada Petroleum Corporation Address Box 2040, Tulsa 2, Oklahoma
Drilling commenced February 20, 1948 Drilling was completed March 2, 1948
Name of drilling contractor McVay & Stafford Drilling Co. Address Tulsa, Oklahoma
Elevation above sea level at top of casing 4396 feet.
The information given is to be kept confidential until Not confidential 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10-3/4"	32.75	8-V	Smls	266'	Tex. Pat.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4"	10-3/4"	266'	200	Halliburton		
8-3/4"	None set					

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

Ben Schlumberger Survey
If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3080' feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dry hole, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. W. Dyer Driller D. K. McClanahan Driller
L. L. Livery Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th, Monument, New Mexico March 4, 1948
day of March, 1948 Name
Will Hale Taylor Notary Public Position Asst. Dist. Supt.
My Commission expires Representing Amerada Petroleum Corporation
Address Drawer D, Monument, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	15'	15'	Cellar
15'	52'	37'	Caliche & Shells
52'	160'	108'	Clay Sand & Gravel
160'	222'	62'	Sand & Shells
222'	272'	50'	Red Bed & Shale
272'	518'	246'	Red Bed
518'	1035'	517'	Red Bed & Sand
1035'	1280'	245'	Red Bed & Sand Shells
1280'	1475'	195'	Red Bed & Anhydrite
1475'	1483'	8'	Red Bed
1483'	1542'	59'	Anhydrite
1542'	1575'	33'	Broken Anhydrite
1575'	1610'	35'	Anhydrite & Red Bed
1610'	1790'	180'	Salt
1790'	2025'	235'	Anhydrite & Salt
2025'	2145'	120'	Salt & Anhydrite Shells
2145'	2220'	75'	Red Bed, Sk Salt & Anhydrite
2220'	2250'	30'	Anhydrite & Salt
2250'	2282'	32'	Broken Anhydrite
2282'	2325'	43'	Anhydrite
2325'	2372'	47'	Broken Anhydrite
2372'	2405'	33'	Anhydrite & Salt
2405'	2540'	135'	Salt, Red Bed, Anhydrite Shells
2540'	2652'	112'	Anhydrite, Red Bed & Salt
2652'	2765'	113'	Anhydrite & Salt
2765'	2905'	140'	Salt, Red Bed, Anhydrite Shells
2905'	2950'	45'	Anhydrite, Salt & Red Bed
2950'	3045'	95'	Anhydrite
3045'	3080'	35'	Anhydrite & Salt
3080'			Total Depth
3080'	3024'	56'	First Plug
252'	233'	19'	Second Plug
			Third Plug at top of hole
<u>GEOLOGICAL TOPS</u>			
			Elevation Derrick Floor 4404'
			Elevation Ground 4396'
			Top of Anhydrite 1480'
			Top of Salt 1595'
			Top of Yates 2268'
<u>SLOPE TESTS</u>			
230'			Straight
1450'			1 degree
1650'			1/2 degree
1900'			1 degree
2360'			2 degrees
2575'			1 1/2 degrees
2666'			1 1/2 degrees
2780'			1-3/4 deg.
2870'			1 1/2 degrees