


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

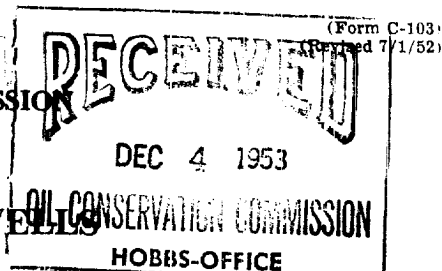

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

| | | | | | |
|---|--|---|----------|--------------------------|--|
| REPORT ON BEGINNING DRILLING OPERATIONS | | REPORT ON RESULT OF TEST OF CASING SHUT-OFF | X | REPORT ON REPAIRING WELL | |
| REPORT ON RESULT OF PLUGGING WELL | | REPORT ON RECOMPLETION OPERATION | | REPORT ON (Other) | |

December 1, 1953

Tatum, New Mexico

(Date)

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Amerada Petroleum Corporation

(Company or Operator)

H. C. Posey "A"

(Lease)

Noble Drilling Corporation

(Contractor)

Well No. **5** in the **NE/** $\frac{1}{4}$ **NE/** $\frac{1}{4}$ of Sec. **11**

T. **12-S 32-E**, R. **32-E**, NMPM, **East Caprock - Devonian** Pool, **Lea** County.

The Dates of this work were as follows: **December 1, 1953**

Notice of intention to do the work ~~(was)~~ (was not) submitted on Form C-102 on _____, 19____, (Cross out incorrect words)

and approval of the proposed plan ~~(was)~~ (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

11,215' Total Depth. Line. Finished drilling 7-7/8" hole @ 10:45 PM on 11/27/53. Ran Schlumberger surveys. Ran a total of 276 joints of 5-1/2" OD casing set @ 11,113' and cemented w/ 700 sacks cement. Pumped plug to 11,026' @ 2:03 PM, 11/29/53. Max. Pump Pressure - 1800#. Ran temperature survey and found top of cement outside of 5-1/2" OD casing @ 7315' or 78.4% fill. After W.O.C. for 24 hours - tested 5-1/2" OD casing for 1/2 hour with 1200# pressure - no pressure drop. Drilled cement from 11,026' to 11,113' and washed to 11,215' - tested 5-1/2" OD casing for 1/2 hour with 1200# pressure - no pressure drop. Continued with completion operations.

Witnessed by **R. Q. Swanson** **Amerada Petroleum Corporation** **Farm Boss**
(Name) (Company) (Title)

Approved: **OIL CONSERVATION COMMISSION**

S. J. Stanley
(Name)

Engineer District 1

(Title)

DEC 4 1953

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name **H. C. Posey**

Position **Assistant District Superintendent**

Representing **Amerada Petroleum Corporation**

Address **Roswell Star Route Tatum, New Mexico**