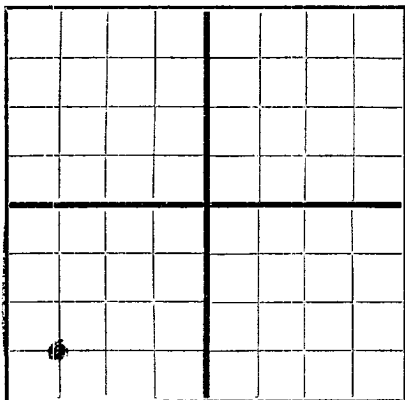


N

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Vickers Petroleum Co., Inc.

Box 744 Roswell, New Mexico

Company or Operator

Address

State "B"

Well No. 2

in CSW SW

of Sec. 29

T. 12S

Lease

R. 32E, N. M. P. M. Caprock Field, Lea County.

Well is 660 feet North of the North line and 660 feet West of the East line of Sec. 29-12S-32E

If State land the oil and gas lease is No. B-10142 Assignment No. B-10142-2

If patented land the owner is, Address

If Government land the permittee is, Address

The Lessee is, Address

Drilling commenced November 3 1948 Drilling was completed November 21 1948

Name of drilling contractor Carper Drilling Co., Address Artesia, New Mexico

Elevation above sea level at top of casing 4381 feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 3008 to 3020 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TC	
8 5/8	26#	Welded	New	300	Guide				
5 1/2	14#	8 Rd.	New	3000	Float				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8	300	150	Halliburton		
7 3/8"	5 1/2	3000	600	Halliburton		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3010 feet, and from feet to feet

Cable tools were used from 3010 feet to 3020 feet, and from feet to feet

## PRODUCTION

Put to producing December 10 1948

The production of the first 24 hours was 80 barrels of fluid of which 25 % was oil; %

emulsion; 75 % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

John Pearse

M. A. Lapsley, Driller J. D. Berry, Driller

Norman Pennell, Driller P. S. LeBlanc, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13

day of Dec. 1948

Ernest Lee Hodges  
Notary Public

My Commission expires March 16, 1949

Roswell N. M. 12 12 - 48  
Place Date

Name Lannie Kemper

Position Production Supt.

Representing The Vickers Petroleum Co., Inc.

Company or Operator

Address Box 744 Roswell, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	190	190	Caliche & Sand
190	320	130	Caliche & Red Bed
320	1380	1060	Red Bed
1380	1444	64	Anhydrite
1444	1510	66	Anhydrite and Shale
1510	2267	757	Salt
2267	3008	741	Anhydrite
3008	3020	12	Red Sand oil bear ing