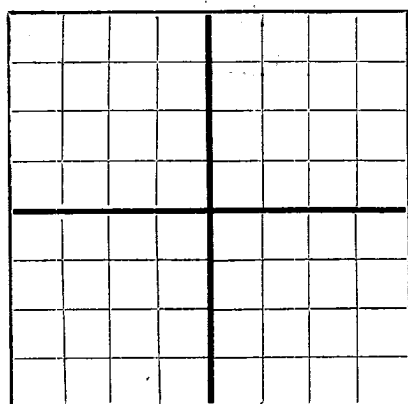


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Phillips Petroleum Company
Company or OperatorBox 1605 - Hobbs, New Mexico
Address

Alden

Well No.

1

in NE/4

of Sec.

32

T

12-S

Lease

R. 32-E

N. M. P. M.

Caprock

Field,

Lea

County.

Well is 1980 feet south of the North line and 660 feet East of the East line of NE/4 Sec. 32

If State land the oil and gas lease is No. B-11330 Assignment No. —

If patented land the owner is — Address —

If Government land the permittee is — Address —

The Lessee is Phillips Petroleum Company Address Bartlesville, Oklahoma

Drilling commenced 10-14 19 48 Drilling was completed 12-3 19 48

Name of drilling contractor Geo. P. Livermore Address Lubbock, Texas

Elevation above sea level at top of casing 4365 feet. Ground

The information given is to be kept confidential until 19 48 Not confidential

OIL SANDS OR ZONES

No. 1, from 2990 to 3051 No. 4, from — to —

No. 2, from — to — No. 5, from — to —

No. 3, from — to — No. 6, from — to —

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from — to — feet.

No. 2, from — to — feet.

No. 3, from — to — feet.

No. 4, from — to — feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	28#	8 rd	Sals	287'	Howe				Surface
5-1/2"	17#	8 rd	Sals	2976'	Howe				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	296.99'	200	Halliburton		
7-7/8"	5-1/2"	2986.69'	1000	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material — Length — Depth Set —

Adapters — Material — Size —

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Not treated or shot				

Results of shooting or chemical treatment —

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 2990 feet, and from — feet to — feet

Cable tools were used from 2990 feet to 3051 feet, and from — feet to — feet

PRODUCTION

Put to producing 12-3 19 48

The production of the first 24 hours was 251 barrels of fluid of which 99.8% was oil; .2% emulsion; —% water; and —% sediment. Gravity, Be 36.1

If gas well, cu. ft. per 24 hours — Gallons gasoline per 1,000 cu. ft. of gas —

Rock pressure, lbs. per sq. in. —

EMPLOYEES

—, Driller —, Driller

—, Driller —, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 8th

day of December 19 48

Sh. O. Knight
Notary Public

My Commission expires 1st Commission expires November 28, 1950

Hobbs, New Mexico 12-8-48

Name M. C. Weston

Position District Chief Clerk

Representing Phillips Petroleum Company

Address Box 1605 - Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	210'	210'	Surface sand and red bed
210'	345'	135'	Red bed
345'	1129'	780'	Red bed and shale
1129'	1403'	274'	Red bed
1403'	1580'	177'	Anhydrite and red bed
1580'	2740'	1160'	Anhydrite and salt
2740'	3023'	283'	Anhydrite and Lime
3023'	3051'	28'	Lime