


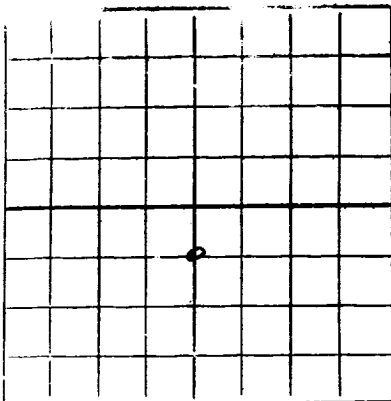

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

Midstates Oil Corporation & Phillips Petroleum Company Lane Unit
(Company or Operator) (Lease)

Well No. 1, in NE 1/4 of SW 1/4, of Sec. 1, T. 10 S., R. 33 E., NMPM.

Lane Pool, Lea County.

Well is 1980 feet from South line and 1980 feet from West line

of Section One (1). If State Land the Oil and Gas Lease No. is E-6253

Drilling Commenced August 13, 1956 Drilling was Completed October 8, 1956

Name of Drilling Contractor Parker Drilling Company

Address Tulsa 3, Oklahoma

Elevation above sea level at Top of Tubing Head 4241' The information given is not to be kept confidential

, 19

OIL SANDS OR ZONES

No. 1, from 9694 to 9702 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8" OD	44.24	New	362'		None		
9-5/8" OD	36 & 40#	New	3944'		None		
5-1/2" OD	17 & 20#	New	9777'		None	9720-22'	Block Squeeze

9675-79' Block Squeeze

& 9694-9702' Completion

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15-1/2"	13-3/8" OD	362	375	Howco Plug		
12-1/4"	9-5/8" OD	3944	1400	Howco Plug		
8-3/4"	5-1/2" OD	9777	600	Howco Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Ops. or Gals. used, interval treated or shot.)

from 9694' to 9702'			
9920	9931	111	Lime
9931	9954	23	Lime & Shale
9954	10199	245	Lime
10199	10261	62	Lime & Shale
10261	10289	28	Lime & Gyp.
10289	10940	651	Lime
iced 157 bbls oil plus 480 bbls water in			
Total Depth			
P.B.T.D. 9777'			
Depth Cleaned Out			

OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 10940 feet, and from feet to feet.
Cable tools were used from None feet to feet, and from feet to feet.

PRODUCTION

Put to Producing November 22, 19 56
OIL WELL: The production during the first 24 hours was 638 barrels of liquid of which 24.6 % was
was oil; % was emulsion; 75.4 % water; and % was sediment. A.P.I.
Gravity 43.5°
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.	1985'		T. Devonian.		T. Ojo Alamo.
T. Salt.			T. Silurian.		T. Kirtland-Fruitland.
B. Salt.			T. Montoya.		T. Farmington.
T. Yates.	2670'		T. Simpson.		T. Pictured Cliffs.
T. 7 Rivers.			T. McKee.		T. Menefee.
T. Queen.	3368'		T. Ellenburger.		T. Point Lookout.
T. Grayburg.			T. Gr. Wash.		T. Mancos.
T. San Andres.	3985'		T. Granite.		T. Dakota.
T. Glorieta.	5340'		T.		T. Morrison.
T. Drinkard.			T.		T. Penn.
T. Tubbs.	6825'		T.		T.
T. Abo.	7680'		T.		T.
T. Penn.	9795'		T.		T.
T. Miss.			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	150	150	Sand & Caliche	8202	8245	43	Shale & Lime
150	280	130	Caliche & Clay	8245	8272	27	Shale
280	562	282	Red Bed	8272	8322	50	Lime & Shale
562	2271	1709	Red Bed & Shale	8322	8337	15	Shale
2271	2719	448	Red Bed, Shale & Salt	8337	8461	124	Shale & Lime
2719	3050	331	Red Bed & Shale	8461	8480	19	Lime
3050	3221	171	Anhydrite, Shale & Salt	8480	8518	38	Lime & Shale
3221	3565	344	Anhydrite & Shale	8518	8578	60	Lime
3565	3707	142	Anhydrite, Shale & Salt	8578	8606	28	Lime & Shale
3707	3921	214	Anhydrite & Shale	8606	8642	36	Lime
3921	5413	1492	Lime	8642	8659	17	Lime & Shale
5413	5565	152	Lime & Shale	8659	8740	81	Lime
5565	7624	2059	Lime	8740	8747	7	Shale & Lime
7624	7681	57	Lime & Shale	8747	8768	21	Lime
7681	7859	178	Shale	8768	8776	8	Lime, Sand & Shale
7859	7877	18	Lime & Shale	8776	8799	23	Lime & Shale
7877	7951	94	Shale	8799	8814	15	Lime & Sand
7951	7959	8	Shale & Gyp.	8814	8945	131	Lime
7959	7976	17	Shale	8945	8969	24	Lime & Shale
7976	7988	12	Lime	8969	9006	37	Lime
7988	7995	7	Shale	9006	9058	52	Lime & Shale
7995	8007	12	Shale, Gyp. & Red Bed	9058	9670	612	Lime
8007	8144	137	Shale	9670	9692	22	Core #1
8144	8181	37	Shale & Lime				
8181	8202	21	Shale				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

November 27, 1956
Company or Operator Midstates Oil Corp. Address Midstates Bldg., Tulsa 3, Oklahoma
Name M. S. Allen Position or Title General Superintendent