


OIL CONSERVATION COMMISSION  
SANTA FE, NEW MEXICO

Miscellaneous Reports on Wells

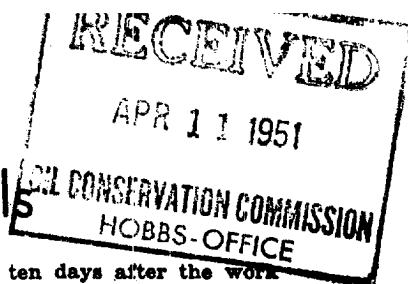

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

April 10, 1951

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO.  
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Amerada Petroleum Corporation State of N. M. Well No. 3 in the

Company or Operator

Lease

C/W/4 NW/4 of Sec. 35, T. 11-S, R. 33-E, N. M. P. M.,

Bagley-Silure/Devonian Field Lea County.

The dates of this work were as follows: April 7, 1951

Notice of intention to do the work was submitted on Form C-102 on April 5, 1951

and approval of the proposed plan was obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

10,965' - Total Depth - Lime & Chert. Ran Temperature Survey - top of cement on outside of 5-1/2" casing at 8152', ratio of actual to calculated fill 72.8%. Ran 2-3/8" O.D. NBE Tubing & 4-3/4" bit & checked top of cement at 10,796'. Tested casing & connections w/1250# for 1/2 hour - no pressure drop. Drilled cement plug from 10,796' to 10,895' & washed to bottom, 10,965'. After drilling cement tested casing & connections w/1250# for 1/2 hour - no pressure drop. Open hole from 10,895' to 10,965'. Continued with completion operations.

Witnessed by K. V. Stephenson Amerada Petroleum Corporation Foreman  
Name Company Title

Subscribed and sworn before me this

I hereby swear or affirm that the information given above is true and correct.

10th day of April, 1951

Name

Position Assistant District Superintendent

Representing Amerada Petroleum Corporation  
Company or Operator

My commission expires 10-11-54

Address Drawer D, Monument, New Mexico

Remarks:

APPROVED

Date APR 12 1951

Oil & Gas Inspector

Title

62

... 1944 ...  
... 1944 ...