

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPlicate
(Other instructions on
reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1.

OIL WELL ☐ GAS WELL ☐ OTHER TA

2. NAME OF OPERATOR

Amerada Hess Corporation

3. ADDRESS OF OPERATOR

Drawer D, Monument, New Mexico 88265

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface

1980' FWL & 660' FNL

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

J. T. Caudle Gas Comm.

9. WELL NO.

7

10. FIELD AND POOL, OR WILDCAT

Bagley Upper Penn. Gas

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 3, T12S, R33E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4264' DF

12. COUNTY OR PARISH

Lea

13. STATE

N.M.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones perti-
nent to this work.)*

Plan to run free point in 2-3/8" tbg., cut off same at approximately 7450' and pull same. Run 4-3/4" bit on 2-3/8" tbg. to top of cut off tbg. Run 5-1/2" pkr. & set above cut off tbg. & test pump in rate. Run 5-1/2" cement retainer and pump 250 sks. cement. Spot 35' of cement on top of cement retainer. Spot 150' of cement plug inside 5-1/2" csg. fr. 5950' to 5800'. Cut off 5-1/2" csg. at approximately 3700' and pull same. Spot 100' of cement plug in and out of cut off 5-1/2" csg. Spot 200' of cement plug in 8-5/8" csg. fr. 1700' to 1500'. Perf. 8-5/8" csg. at 350' & circ. cement to surface. Spot 50' cement plug at surface to P&A.

Verbal approval Mr. P. Chester w/B.L.M. 7-7-83.

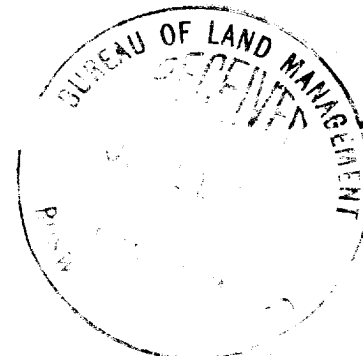

18. I hereby certify that the foregoing is true and correct

SIGNED

E. B. Fisher

TITLE Supv. Adm. Ser.

DATE 7-7-83

(This space for Federal or State office use)

(Orig. Sgd.) PETER W. CHESTER

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

AUG 31 1983

*See Instructions on Reverse Side