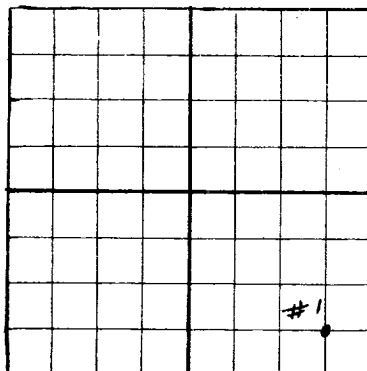



N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Devonian Oil Co.

Sundown, Texas

Company or Operator

R. F. Windfehr State

Well No.

1

in

SE 4/

NE 4

of

Sec.

25

T.

11S

Address

R.

35E

N. M. P. M.

Field,

Loc.

County.

Well is

4820

feet south of the North line and

660

feet west of the East line of

Sec. 25

If State land the oil and gas lease is No.

B-3818

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced

8-21-44

19

Drilling was completed

9-14-44

19

Name of drilling contractor

Milhoan Drilling Co.

Address

Tulsa, Okla.

Elevation above sea level at top of casing

4065'

feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from

to

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

| SIZE | WEIGHT PER FOOT | THREADS PER INCH | MAKE | AMOUNT | KIND OF SHOE | CUT & FILLED FROM | PERFORATED | | PURPOSE |
|---------|-----------------|------------------|--------|--------|------------------|-------------------|------------|----|---------|
| | | | | | | | FROM | TO | |
| 13-3/8" | 36# | Welded | Nat'l. | 320' | None | | | | |
| 9-5/8" | 24.95# | Welded | Nat'l. | 2282' | Baker guide shoe | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

MUDDING AND CEMENTING RECORD

| SIZE OF HOLE | SIZE OF CASING | WHERE SET | NO. SACKS OF CEMENT | METHOD USED | MUD GRAVITY | AMOUNT OF MUD USED |
|--------------|----------------|-----------|---------------------|-------------|-------------|--------------------|
| 17" | 13-3/8" | 320' | 325 | Halliburton | 10.2# | 5 tons |
| 12 1/2" | 9-5/8" | 2282' | 325 | Halliburton | 11# | 3 tons |
| | | | | | | |
| | | | | | | |
| | | | | | | |

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

| SIZE | SHELL USED | EXPLOSIVE OR CHEMICAL USED | QUANTITY | DATE | DEPTH SHOT OR TREATED | DEPTH CLEANED OUT |
|------|------------|----------------------------|----------|------|-----------------------|-------------------|
| | | | | | | |
| | | | | | | |
| | | | | | | |

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 5129' T.D.D.F. feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

R. C. Holland Driller R. H. Kennits Driller

John Green Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19

Sundown, Texas

Sept. 19, 1944

day of Sept. 19 44

Name F. H. Wolfe

Position Supt.

Representing Devonian Oil Co.

Address Sundown, Texas

Doye Massie Notary Public

My Commission expires June 1945

FORMATION RECORD

| FROM | TO | THICKNESS IN FEET | FORMATION |
|-----------------|----------------|----------------------|-----------------------------|
| 0 | 40 | 40 | Sand & caliche |
| 40 | 200 | 160 | Blue shale & shells |
| 200 | 321 | 121 | Blue shale red bed & shells |
| 321 | 500 | 179 | Brown shale & shells |
| 500 | 2135 | 1635 | Red bed & shells |
| 2135 | 2165 | 30 | sand & shells |
| 2165 | 2190 | 25 | red bed |
| 2190 | 2215 | 25 | red bed & shells |
| 2215 | 2247 | 72 | anhy. |
| 2247 | 2590 | 303 | anhy. & salt |
| 2590 | 3018 | 428 | salt, anhy. & gyp |
| 3018 | 4135 | 1117 | anhy., gyp & shale |
| 4135 | 4145 | 10 | anhy. & salt |
| 4145 | 4290 | 145 | anhy. shale & gyp |
| 4290 | 4304 | 14 | anhy. & sand |
| 4304 | 4332 | 28 | anhy. & shale |
| 4332 | 4468 | 136 | lime & anhy. |
| 4468 | 5129 | 681 | lime |
| | 5129' T.D.D.F. | | |
| Top of porosity | | 5085' | |
| Water | | 5050' | |