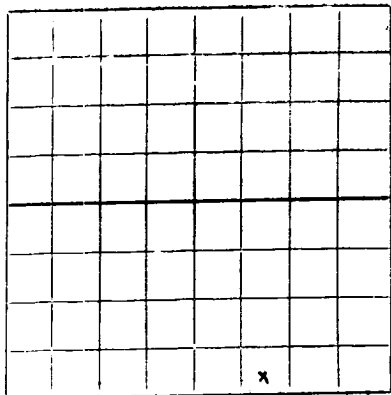


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

The Ohio Oil Company

(Company or Operator)

State E 6859-A

(Lease)

Well No. 1, in SW 1/4 of SE 1/4, of Sec. 2, T. 9 S, R. 36 E, NMPM.

Allison-Pennsylvania

Pool,

Lea

County.

Well is 660 feet from South line and 1980 feet from East line

of Section 2-9-36. If State Land the Oil and Gas Lease No. is

Drilling Commenced May 5, 1954 Drilling was Completed July 24, 1954

Name of Drilling Contractor Company tools - Rig #2

Address Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head The information given is to be kept confidential until, 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
16"	65#	New	362' 7"	Baker guide shoe			
10-3/4"	40.5#, 45.5# & 51#	New	4154' 9"	Larkin float shoe		float collar	
7"	29#, 23#, 26#	New	9711' 6"				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
22"	16"	384'	710	B. J. Service		
15"	10-3/4"	4175'	1900	" " "		
8-3/4"	7"	9730'	900	" " "		
Tbg.	2-7/8"	9703'				

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Perforated 7" casing from 9690' to 6695' w/6 jet shots per ft.

Acidized w/500 gals. mud acid from 9690' to 9695'.

Result of Production Stimulation Well flowed 156 bbls. oil on 8 1/2 hr. test thru 19/64" choke,

GOR 1870:1

Depth 9731', P. B. 9712'

END OF DRILL-STEM AND SPECIAL TEST

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from surface feet to T.D. 9731' feet, and from - feet to - feet.
 Cable tools were used from - feet to - feet, and from - feet to - feet.

PRODUCTION

Put to Producing August 4, 1954
 OIL WELL: The production during the first 24 hours was 142 barrels of liquid of which 100 % was
 was oil; - % was emulsion; - % water; and - % was sediment. A.P.I.
 Gravity 48.5
 GAS WELL: The production during the first 24 hours was - M.C.F. plus - barrels of
 liquid Hydrocarbon. Shut in Pressure - lbs.
 Length of Time Shut in -

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....	T. Devonian.....	T. Ojo Alamo.....
T. Salt.....	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt.....	T. Montoya.....	T. Farmington.....
T. Yates.....	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen.....	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres..... <u>4090'</u>	T. Granite.....	T. Dakota.....
T. Glorieta.....	T. <u>Wolfcamp 9050'-9055'</u>	T. Morrison.....
T. Drinkard.....	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo..... <u>7730'-7740'</u>	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	425	425	Caliche, Red Bed.				
425	1252	827	Red Bed.				
1252	1875	623	Red Bed, Anhydrite.				
1875	2228	353	Red Bed, Anhydrite, Gyp.				
2228	2415	187	Anhy., Lime, Gyp.				
2415	2751	336	Anhy., Red Bed, Salt, Gyp.				
2751	3783	1032	Anhy., Gyp, Shale, Salt, Lime.				
3783	4087	304	Anhydrite.				
4087	4634	547	Lime, Anhy.				
4634	5039	405	Lime.				
5039	5390	351	Lime, Shale.				
5390	6259	869	Lime.				
6259	8659	2400	Lime, Shale, Anhy.				
8659	9086	427	Lime, Shale, Anhy., Red Rock, Dolo.				
9086	9176	90	Lime.				
9176	9379	203	Lime, Chert, Anhy., Shale.				
9379	9505	126	Lime, Dolo., Shale, Chalk.				
9505	9731	226	Lime, Dolo., Shale.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Hobbs, New Mexico August 30, 1954
 (Date)

Company or Operator The Ohio Oil Company Address Box 2107
 Name [Signature] Position or Title Superintendent