


DEVON ENERGY CORPORATION
WELLBORE SCHEMATIC

WELL NAME: Caprock State #1			FIELD: East Caprock (Penn)			
LOCATION: Section 23, T12S, R32E			COUNTY: Lea			STATE: NM
ELEVATION: GL=4341' - KB=4354'			SPUD DATE: 2/11/85		COMP DATE: 6/13/85	
API#: 30-025-29106		PREPARED BY: W. M. Frank			DATE: 7/22/98	
TUBULARS	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 400'	12"	68	S-80	ST&C	17 1/2
CASING:	0' - 3650'	12"	24	K-55	ST&C	11
CASING:	0' - 11223'	6 1/2"	20/17	N-80	LT&C	7 7/8
Casing Patch	7246 - 7437'	4"	12.93	Hydrii	Flush Joint	
TUBING:		2 3/8"	4.7	N-80	8rd	

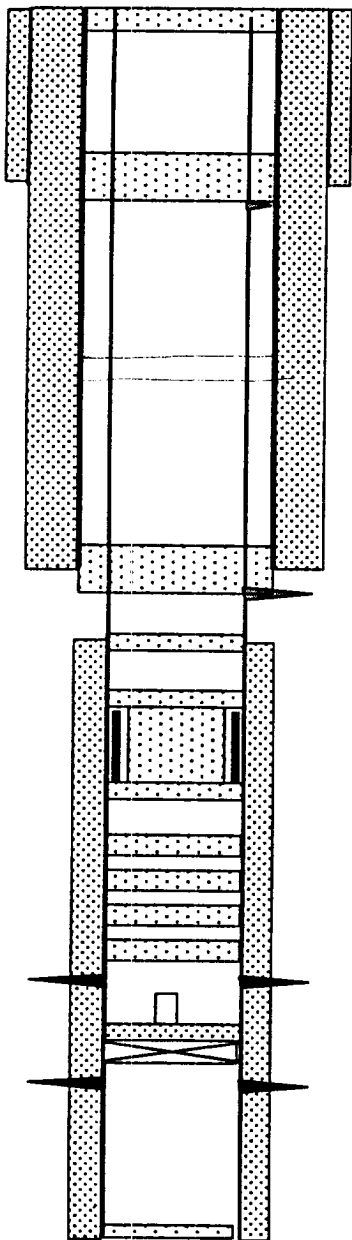

☐ CURRENT ☒ PROPOSED

Surface plug, in/out with 1" @ 30'

13.375" Casing Cmt'd w/400 sxs "C"

Surface pipe plug, in/out @ 500' - 50 sxs "C" pumped under CIBP @ 300'

Salt plug @ 1400 (25' or 100' whichever greater)

8 5/8" CASING, CMT'D W/1400 SXS. CMT TO SURFACE.

Inter. plug, in/out @ 3,750' - 50 sxs "C" pumped under CIBP @ 3,550'

TOC @ 6710' f/Temp. Survey

TOC plug @ 6,810' - 30 sxs "C" pumped.

Baker Dual Packer Casing patch w/minimum ID of 3.215"

Top of patch @ 7,246', Bottom @ 7,437'

Casing collapse plug f/7,450' to 7,206' - 30 sxs "C" pumped.

Wolfcamp Plug @ 8,332' - 30 sxs "H" pumped.

Penn Plug @ 9,060' - 30 sxs "H" pumped.

Strawn Plug @ 9,776' - 30 sxs "H" pumped.

Atoka Sand Plug @ 10,374' - 30 sxs "H" pumped and tagged.

Atoka Perfs: 10375 - 384' (4 spf via TCP).

CIBP @ 10770' and capped w/2 sxs cmt. Junk packer pushed to 10686'.

Miss. Perfs: 10796 - 814' (1 spf). Frac'd, unknown sand concentration.

5 1/2" SHOE @ 11223', CMT'D W/850 SXS.

TD @ 11276'