

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.

30-025-29843

5. Indicate Type of Lease

STATE ☒

FEE ☐

6. State Oil & Gas Lease No.

VO-4510

7. Lease Name or Unit Agreement Name

Sand Spring ASU State

8. Well No.

1

9. Pool name or Wildcat

Sand Springs Atoka Morrow (gas)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil
WELL ☐

Gas
WELL ☒

Other

2. Name of Operator

YATES PETROLEUM CORPORATION

3. Address of Operator

105 South 4th St., Artesia, NM 88210

4. Well Location

Unit Letter C : 330 Feet From The North Line and 1650 Feet From The West Line

Section 11

Township 11S

Range 34E

NMPM

Lea

County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)

4145' GR

11.

Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

PULL OR ALTER CASING ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐

ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐

PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: Perforate & acidize Atoka ☒

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

7-10-12-99 - Moved in and rigged up pulling unit.

7-13-99 - Removed plunger lift equipment. Rigged up wireline. Fished bumper sub. Set 1.875" blanking plug in on/off tool at 12010'. Bled tubing down and loaded with 65-1/2 bbls 2% KCL. Released on/off tool. Nippled down wellhead and nipped up BOP. TOOH with tubing. Rigged up electric line. TIH with gauge ring and junk basket. TOOH. TIH with shorty wireline set RBP and set at 12000'. Shut well in.

7-14-99 - Rigged up wireline with full lubricator. TIH with 4" casing guns and perforated 11933-11974' w/104 .42" holes as follows: 11933-11944' and 11961-11974' (4 SPF - Atoka). TOOH with casing guns. Rigged down wireline and lubricator. TIH with packer with 1.875" on/off tool. Nippled down BOP and nipped up tree. Set packer at 11850'. Flanged up and swabbed. Shut well in.

7-15-99 - Bled well down to pit. Swabbed. Shut well in.

7-16-99 - Rigged up treesaver. Acidized perforations 11933-11974' (Atoka) with 1500 gallons

7-1/2% acid with 25% methanol, nonionic surfactant package with 1000 scf/bbl N2 & ball sealers.

CONTINUED ON NEXT PAGE:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Rusty Klein

TITLE

Operations Technician

DATE

July 22, 1999

TYPE OR PRINT NAME

Rusty Klein

TELEPHONE NO. 505/748-1471

ORIGINAL SIGNED BY

(This space for State Use)

GARY WINK
FIELD REP. II

APPROVED BY

TITLE

DATE

JUL 27 1999


CONDITIONS OF APPROVAL, IF ANY:

9/6/99 DT 446-792
7/1/99 9626-CT

YATES PETROLEUM CORPORATION
Sand Spring ASU State #1
Section 11-T11S-R34E
Lea County, New Mexico

SUNDRY NOTICE CONTINUED:

Flowing back to pit.
7-17-19-99 - Flow tested. Shut well in. Released well to production department.

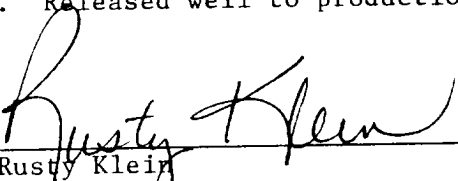

Rusty Klein
Operations Technician
July 22, 1999