

P. O. BOX 1980
HOBBS, NEW MEXICO 88240

UNITED STATES

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONTACT RECEIVED
OFFICE FOR NUMERICAL
OF COPIES REQUIRED
(Other instructions on reverse side)

BLM Roswell District
Modified Form No.
NM60-3160-4

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		7. UNIT AGREEMENT NAME Milnesand Unit
2. NAME OF OPERATOR Breck Operating Corp.		8. FARM OR LEASE NAME
3. ADDRESS OF OPERATOR P. O. Box 911 Breckenridge, Texas 76024		9. WELL NO. 71
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface Unit Letter "M"; 990' FSL & 330' FWL		10. FIELD AND POOL, OR WILDCAT Milnesand (San Andres)
14. PERMIT NO.		11. SEC. T. R. M. OR BLM. AND SURVEY OR AREA Sec. 5, T-8S, R-35E
15. ELEVATIONS (Show whether DT, RT, GR, etc.) 4243' GR		12. COUNTY OR PARISH Roosevelt
		13. STATE New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETION ☐

ABANDON* ☒

CHANGE PLANE ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☐

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Breck Operating Corp. is planning to plug and abandon the subject well. Please see the attached wellbore diagrams for the present status and proposed status. The BLM representative will be notified in sufficient time to witness all P&A operations.



18. I hereby certify that the foregoing is true and correct

SIGNED

Kevin G. Sullivan

TITLE Petroleum Engineer

DATE 10-12-90

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

APPROVED
PETER W. CHESTER

OCT 25 1990

*See Instructions on Reverse Side

BUREAU OF LAND MANAGEMENT
ROSWELL RESOURCE AREA
ROSWELL, NEW MEXICO

BRECK OPERATING CORP.



P. O. BOX 911

BRECKENRIDGE, TEXAS 76024-01

DATE 10-12-90 WELL NO. 71 LEASE Milnesand Unit FIELD Milnesand
(San Andres)

PRESENT STATUS

Surface casing: 8 5/8" 32# @ 363' w/ 250 sx cmt. Cmt circ.
Production casing: 4 1/2" 11.6# @ 4630' w/ 150 sx cmt.
TOC @ 3800'.
Perforations: 4570 - 4615'.
TD: 4630'
PBSD: 4626'

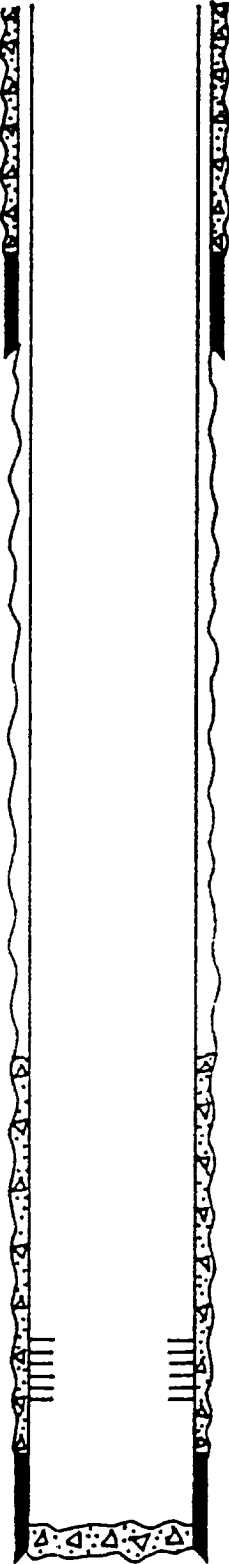

BRIDGE PLUG



PACKER



CENTRALIZER



SCRATCHER



BASKET



PERFORATION

BRECK OPERATING CORP.


P. O. BOX 911

BRECKENRIDGE, TEXAS 76024-0911

DATE 10-12-90 WELL NO. 71 LEASE Milnesand Unit FIELD Milnesand
(San Andres)

PROPOSED STATUS

1. Set CIBP @ 4520' above perforations @ 4570 - 4615' & dmp 3 sx cmt on top of CIBP from 4520 - 4485'.
2. Load hole w/ 9.5# mud.
3. Determine free point of 4 1/2" csg (estimate \pm 3800'). Cut csg @ \pm 3800' & POOH. Pmp 40 sx cmt from \pm 3870 - 3730' across csg stub. *Tag plug*
4. Pmp 35 sx cmt from 413 - 313' across csg shoe @ 414'.
5. Cut off csg 3' below GR. Dump 15 sx cmt from 53 - 3'. Weld on plate & const dry-hole marker.



BRIDGE PLUG



PACKER



CENTRALIZER



SCRATCHER



BASKET



PERFORATION