

N. M. OIL & GAS COMMISSION
P. O. BOX 1980 AUG 14 1995
HOBBS, NEW MEXICO 88240

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other
2. Name of Operator
M & W OF LOVINGTON, INC.
3. Address and Telephone No.
BOX 922 LOVINGTON, N.M. 88260
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEC. 30 (NWSE Twn 8 Rge. 37E NMPM

5. Lease Designation and Serial No.
NM-03586
6. If Indian, Allottee or Tribe Name
7. If Unit or CA, Agreement Designation
8. Well Name and No.
HAYES FED. # 1
9. API Well No.
30-041-00060
10. Field and Pool, or Exploratory Area
ALLISON PENN
11. County or Parish, State
ROOSEVELT NEW MEX.

CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Casin collapsed at 6300' & tubing at 6350'.
2. An attempt to pull tubing and swage out casin was made in April of 1985. A total of \$61,800.00 (15 days) was expended before the well was T.A.
3. Pump minimum 200 sks. cement below collapsed casin at 6834'.
4. Set cast iron bridge plug above 6300'. with 100' cement plug, tag plug.
5. Set plug at 3941'-3801' (140' plug). 70' in 4-1/2 " liner and 70' into 8-5/8" casin (8-5/8" casin cemented to surface. Tag plug.
6. Set plug at 410'-310' (100' plug). Tag plug.
7. Plug surface. Minimum 50' cement plug.
8. Work to begin 90 days after approval.


14. I hereby certify that the foregoing is true and correct

Signed Peter W. Chester Title PRESIDENT

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

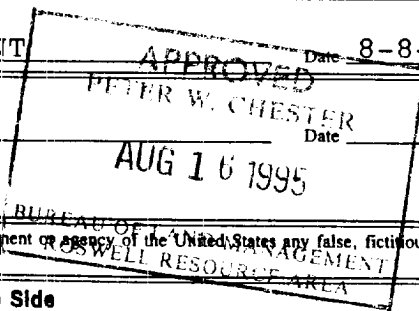

Date 8-8-95

Date _____

Note: 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See instruction on Reverse Side

