


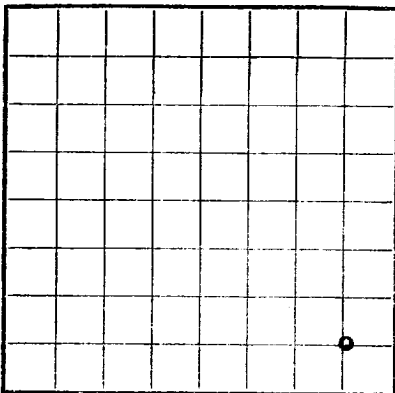

LOCATE WELL CORRECTLY

NOTED
MAR 31 1961U. S. LAND OFFICE New Mexico
SERIAL NUMBER 02875
LEASE OR PERMIT TO PROSPECT _____

STANDLEY,

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Nearburg & Ingram Address P. O. Box 1757 - Roswell, New Mexico
Lessor or Tract Anderson Field Undesignated State New Mexico
Well No. 4 Sec. 29 T. 8S R. 37E Meridian NMPH County Roosevelt
Location 660 ft. N. of S Line and 660 ft. W. of E Line of 29 Elevation 4052' KB
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed Robert M. MartinDate March 29, 1961Title Clerk

The summary on this page is for the condition of the well at above date.

Commenced drilling 2/8/, 1961 Finished drilling 3/22/, 1961

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 9544 to 9546 No. 4, from _____ to _____
No. 2, from 9552 to 9570 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10-3/4	32.75#	ST&C	CFE	440'	HOMCO	Surface			Surface
7-5/8	24.4#	ST&C	"	9544'	"	Intermediate			Intermediate
4-1/2	11.6#	LT&C	"	9544'	"	011	(9544	9546	011
	9.5#	ST&C	"	9552'	"		(9552	9570	
2-3/8	4.6#	ST&C	Tbg (set @ 9571')						

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4	394'	350	Pump		
7-5/8	4227'	1000	"		
4-1/2	9660'	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Plug back Depth 9606'
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
	Acidized w/500 gals	Spearhead + 3000 gals	regular			

TOOLS USED

Rotary tools were used from 0 feet to 9660 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

Put to producing 3/25/, 1961

The production for the first 18 hours was 200 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. 48

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____ Flwg on 16/64" choke, FTP 1500#, CP - pkr,
GOR 1995, gas = 399 MCF

EMPLOYEES

Great Western Drilling Co. _____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	2348	2348	Sand & Red Beds
2348	2855	507	Anhydrite & Salt
2855	4100	1245	Sand & Anhydrite
4100	5515	1415	Dolomite
5515	7685	2170	Sands, Dolomite, & Shale
7685	9008	1323	Shale & Dolomite
9008	9660	652	Shale & Limestone
9660' = Total Depth			
Log Tops:			
Rustler	2348'		
Yates	2855'		
San Andres	4100'		
Glorieta	5515'		
Abo	7685'		
Hueco	9008'		
Penn	9428'		
Bough "C"	9542'		

