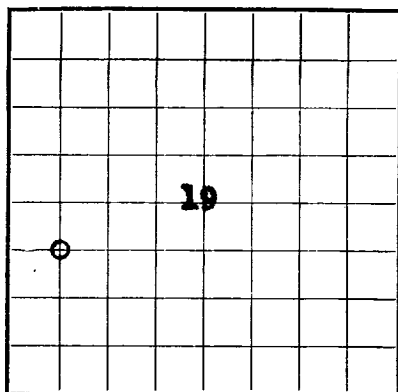


COPY TO O. G. C.

U. S. LAND OFFICE
SERIAL NUMBER **069966**
LEASE OR PERMIT TO PROSPECT

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

RECEIVED
APR 15 1960
U. S. GEOLOGICAL SURVEY
HOUSTON, NEW TEXAS

Company **Nearburg & Ingram** Address **P. O. Box 847, Roswell, N. Mex.**
Lessor or Tract **Saiken** Field **Bluitt-Penn** State **New Mexico**
Well No. **2** Sec. **19** T. **8-S** R. **37E** Meridian **NMPM** County **Roosevelt**
Location **1980** ft. **N** of **S** Line and **660** ft. **E** of **W** Line of **Sec. 19** Elevation **4074**
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.

Signed

Date **April 14, 1960**Title **Clerk**

The summary on this page is for the condition of the well at above date.

Commenced drilling **2/28**, 19**60** Finished drilling **4/8/**, 19**60**

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from **9588** to **9606** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10-3/4	32.75			411	HDWC				Surface
7-5/8	24.25			4550					Intermediate
4-1/2	13.75			9670					Oil
2-3/8	4.6		CPI	9601					

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4	411	350	Pump		
7-5/8	4550	1000	"		
4-1/2	9670	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ P.B. Depth **9642'**
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from **0** feet to **9670** feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

Put to producing **4/13/**, 19**60**

The production for the first **15** hours was **195** barrels of fluid of which **100**% was oil; _____%
emulsion; _____% water; and _____% sediment. Gravity, °Bé. **48**

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. **TP 730** **GOR: 700**

EMPLOYEES

Braham Drilling Co., Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	2300	2300	Sand & Red Beds
2300	2870	570	Anhydrite & Salt
2870	4066	1196	Sand & Anhydrite
4066	5495	1429	Dolomite
5495	7712	2217	Sand, Dolomite & Shale
7712	9030	1318	Shale & Dolomite
9030	9670	640	Shale & Limestone
	9670' =	Total Depth	
Tops:			
Rustler	2300'		
Yates	2870'		
San Andres	4066'		
Glorieta	5495'		
Abo	7712'		
Hueco	9030'		
Penn	9446'		
Bough "C"	9581'		

