

Form 3160-5  
(July 1989)  
(Formerly 9-301)

**U. S. N. M. OIL CONS. COMM. AND STATES**  
**DEPARTMENT OF THE INTERIOR**  
**BUREAU OF LAND MANAGEMENT**  
**HOBBS, NEW MEXICO**

CONTACT RECEIVED  
OFFICE FOR NUM  
OF COPIES REQUIRED  
(Other instructions on reverse side)

BLM Roswell District  
Modified Form No.  
ND60-3160-4

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. <input type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER WIW		7. UNIT AGREEMENT NAME <b>Milnesand Unit</b>
2. NAME OF OPERATOR <b>Breck Operating Corp.</b>	3a. Area Code & Phone No. <b>(817) 559-3355</b>	8. FARM OR LEASE NAME
3. ADDRESS OF OPERATOR <b>P.O. Box 911 Breckenridge, Texas 76024</b>		9. WELL NO. <b>11</b>
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface <b>Unit Letter "N"; 660' FSL &amp; 1980' FWL</b>		10. FIELD AND POOL, OR WILDCAT <b>Milnesand (San Andres</b>
14. PERMIT NO.		11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA <b>Sec. 5, T-8S, R-35E</b>
15. ELEVATIONS (Show whether DF, RT, GR, etc.) <b>4243' GR</b>		12. COUNTY OR PARISH 13. STATE <b>Roosevelt New Mexico</b>

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input checked="" type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(Other) <input type="checkbox"/>	

(Other) \_\_\_\_\_

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface location and measured and true vertical depths for all markers and zones pertinent to this work.) \*

Breck Operating Corp. is planning to plug and abandon the subject well. Please see the attached wellbore diagrams for the present status and proposed status. The BLM representative will be notified in sufficient time to witness all P&A operations.



18. I hereby certify that the foregoing is true and correct

SIGNED

*Kim G. Sullivan*

TITLE **Petroleum Engineer**

DATE **10-12-90**

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

APPROVED  
PETER W. CHESTER  
DATE

OCT 24 1990

BUREAU OF LAND MANAGEMENT  
ROSWELL RESOURCE AREA

\*See Instructions on Reverse Side

# BRECK OPERATING CORP.

P.O. BOX 911

BRECKENRIDGE, TEXAS 76024-0911

DATE 10-12-90 WELL NO. 11 LEASE Milnesand Unit FIELD Milnesand  
(San Andres)

## PRESENT STATUS

Surface Casing: 8 5/8" 24# @ 410' w/ 200 sx cmt. Cmt circ


Production Casing: 4 1/2" 9.5# @ 4744' w/ 250 sx.

TOC @ 3785'.

Performations: 4598 - 4631'

TD: 4744'

PBTD: 4704'



BRIDGE PLUG



PACKER



CENTRALIZER



SCRATCHER



BASKET




PERFORATION

# BRECK OPERATING CORP.

P.O. BOX 911


BRECKENRIDGE, TEXAS 76024-0911

DATE 10-12-90 WELL NO. 11 LEASE Milnesand Unit FIELD Milnesand  
(San Andres)

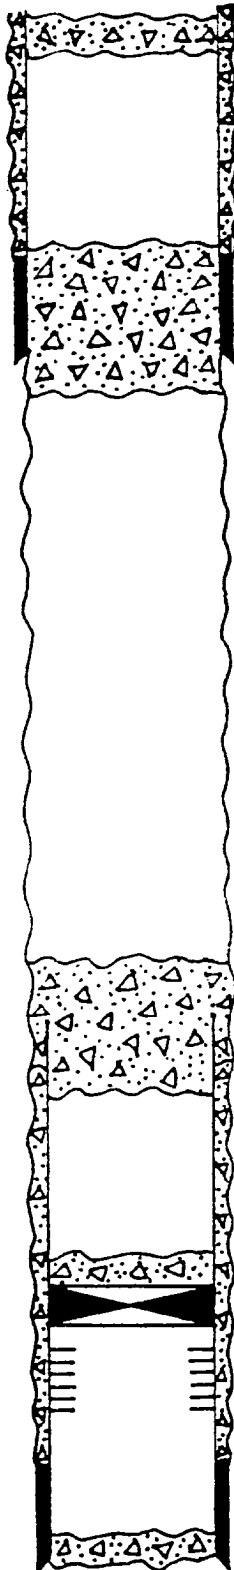

## PROPOSED STATUS

1. Set CIBP @ 4550' above perfs @ 4598 - 4631' & dump 3 sx cmt on top of CIBP from 4550 - 4515'.
2. Load hole w/ 9.5# mud.
3. Determine free point of 4 1/2" csg. (Estimate  $\pm$  3785'). Cut csg @  $\pm$  3785' & POOH. Pmp 40 sx cmt from  $\pm$  3855 - 3715' across csg stub. *Tag plug.*
4. Pmp 35 sx cmt from 460 - 360' across csg shoe @ 410'.
5. Cut off csg 3' below GR. Dump 15 sx cmt from 53 - 3'. Weld on plate & const dry-hole marker.



BRIDGE PLUG



PACKER



CENTRALIZER



SCRATCHER



BASKET



PERFORATION