

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division  
1625 N. French Dr.  
Hobbs, NM 88240

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

**1 Type of Well**

☒ Oil Well ☐ Gas Well ☐ Other

**2 Name of Operator**

Mack Energy Corporation

**3 Address and Telephone No.**

P.O. Box 960, Artesia, NM 88211-0960 (505)748-1288

**4 Location of Well (Footage, Sec., T. R., M. or Survey Description)**

Sec. 27-T7S-R35E 1650 FNL & 990 FEL

**5 Lease Designation and Serial No.**

NM-016663

**6 If Indian, Allottee or Tribe Name**

**7 If Unit or CA, Agreement Designation**

**8 Well Name and No.**

Federal H-27 #1

**9 API Well No.**

30-041-10069

**10 Field and Pool, or Exploratory Area**

Todd Lower San Andres

**11 County or Parish, State**

Roosevelt, NM

**12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

**TYPE OF SUBMISSION**

- ☒ Notice of Intent  
☐ Subsequent Report  
☐ Final Abandonment Notice

**TYPE OF ACTION**

- ☒ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☐ Other


- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

**13 Describe Proposed or Completed Operations** (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Mack Energy Corporation proposes to plug as follows:

1. Set CIBP at 4000' with <sup>35'</sup>~~20'~~ cement on top.
2. Spot 100' plug from 285'-185'. Set behind 4 1/2" casing. Plug plug.
3. Spot 60' surface plug. Set behind 4 1/2" casing.
4. Install dry hole marker.

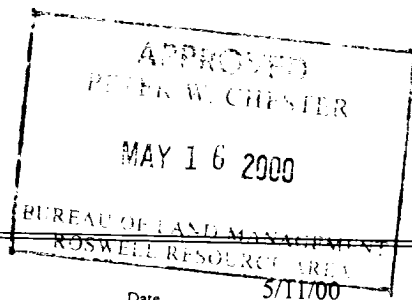

**14 I hereby certify that the foregoing is true and correct**

Signed Curtis D. Carter

Title Production Analyst

Date 5/11/00

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date

GWW

4  
MAY 2000  
Received  
Heddy  
11

RECEIVED

MAY 12 2000

BLM  
ROSWELL, NM