

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-0533777-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

H

8. FARM OR LEASE NAME

Humble Federal

9. WELL NO.

3

10. FIELD AND POOL, OR WILDCAT

Chaveroo San Andres

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

26, T 7S, R 32E

12. COUNTY OR PARISH

Roosevelt

13. STATE

N.M.

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Silver Monument Minerals, Inc.

3. ADDRESS OF OPERATOR

Box 1476, Lovington, New Mexico 88260

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface Unit H, 1980' from North line and 660' from East
line, Section 26, T 7S, R 32E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

KB-4457.8

GL-4448.8

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Pull tubing, rods and pump, remove well head, all fittings, valves and connections, and pull approximately 2500' 5 1/2" casing, and plug as follows:

CIPB topped with 5 sx cement at 3500'
25-45 sx cement on top of stub at 2500'
28 sx top of salt 1780' to 1880'
28 sx bottom of surface 351'
10 sx surface with marker
9.5 mud between plugs.

18. I hereby certify that the foregoing is true and correct

SIGNED

Arthur R. Brown

TITLE President


DATE 8/17/73

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

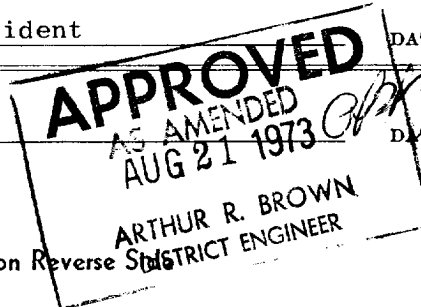

*See Instructions on Reverse Side

RECEIVED

AUG 20 1976

U.S. CONSERVATION COMMISSION
HUBBS, H. H.