

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
HOBBS, NEW MEXICO

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.

88240 NM 055 6301

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. ☒ OIL WELL ☐ GAS WELL ☐ OTHER

2. NAME OF OPERATOR
Read & Stevens, Inc.

3. ADDRESS OF OPERATOR
P. O. Box 1518 Roswell, NM 88202

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
660' FSL & 660' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
4124.3 GL

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Federal B

9. WELL NO.
1

10. FIELD AND POOL, OR WILDCAT

S. Prairie

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 30-8S-36E

12. COUNTY OR PARISH
Roosevelt

13. STATE
NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING


ABANDONMENT*

(Other)

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Set 35 sx cmt plug @ 9,512', circ hole w/9ppg mud laden fluid. Set 35 sx cmt plug @ 6,580' to 6,380' and tag. Cut and pull 5 1/2" csg @ 4,150'. Set 50 sx cmt plug @ 4,047', and 45 sx cmt plug @ 2,800'. Cut and pull 8 5/8" csg from 882'. Set 50 sx cmt plug @ 330' to 663' and plug. POH to 375' and set 50 sx plug, tag @ 270'. Set 50' surface plug and set DHM. RDMOPU well P&A 3/12/92. BLM notified.

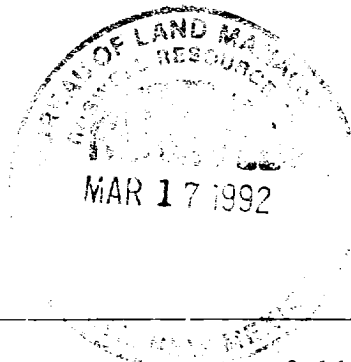

18. I hereby certify that the foregoing is true and correct

SIGNED

John C. Maxey, Jr.

TITLE Petroleum Engineer

DATE 3-16-92

(This space for Federal or State police use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

Approved as to plugback of the well BOPB
Liability under bond is retained until
surface restoration is completed.

DATE

APPROVED
MAR 27 1992

Orig.+5xc to BLM

xc:Well file, partners, land, acct, DL

*See Instructions on Reverse Side