

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE
(Other instructions on reverse side)

COPY TO O. G. C.

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. <input type="checkbox"/> OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER		5. LEASE DESIGNATION AND SERIAL NO. NM-14154	
2. NAME OF OPERATOR SUNDANCE OIL COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
3. ADDRESS OF OPERATOR Suite 510, 1776 Lincoln St., Denver, CO 80203		7. UNIT AGREEMENT NAME	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 660' FSL and 660' FEL		8. FARM OR LEASE NAME Chambers-Federal	
14. PERMIT NO.		9. WELL NO. 1	
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 4447' KB, 4437' GR		10. FIELD AND POOL, OR WILDCAT Tomahawk, San Andres	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA SE SE Sec. 30-7S-32E	
		12. COUNTY OR PARISH Roosevelt	
		13. STATE New Mexico	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐

(Other)

PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐ABANDON* ☐CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐FRACTURE TREATMENT ☐SHOOTING OR ACIDIZING ☐(Other) Set Surface Casing ☒REPAIRING WELL ☐ALTERING CASING ☐ABANDONMENT* ☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled 11" hole from surface to 1780'. Ran and set 43 jts. of 8 5/8" CD 24# J-55 casing at 1780'. Cemented w/500 sx (400 sx Class H & 100 sx Class C w/2% CaCl and 5#/sx Gilsonite). Good returns throughout. Circulated approximately 25 sx cement to surface.

Spudded 7-23-77

18. I hereby certify that the foregoing is true and correct

SIGNED

Richard O. Dimit
Richard O. Dimit

TITLE

Chief Engineer

DATE


August 31, 1977

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

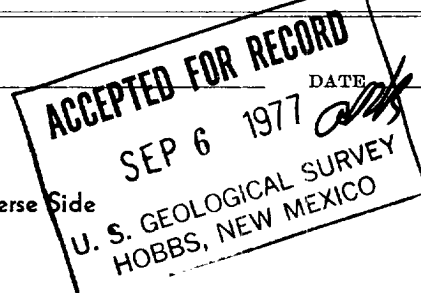

*See Instructions on Reverse Side