

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐  
well well well

2. NAME OF OPERATOR  
SUNDANCE OIL COMPANY

3. ADDRESS OF OPERATOR  
#510, 1776 Lincoln St., Denver, CO 80203

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' FSL, 1980' FEL, Unit 0  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) SET SURFACE CASING

## SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

RECEIVED

AUG 16 1979

U. S. GEOLOGICAL SURVEY  
HOBBS, NEW MEXICO

NOTE: Report results of multiple completion or zone change on Form 9-330.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
4487' GL

5. LEASE  
NM-15019

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Cone Federal

9. WELL NO.  
16

10. FIELD OR WILDCAT NAME  
Tomahawk, San Andres

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
SW SE Section 31, T.7S., R.32E.

12. COUNTY OR PARISH  
Roosevelt

13. STATE  
New Mexico

14. API NO.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spudded 12 1/4" surface hole at 1:45 p.m. 8/6/79. Drilled to 1771'. Ran 43 jts. 8 5/8", 24# surface casing. Set at 1771'. Cemented with 250 sx 3% Lowdense + 230 sx Class C, 2% CaCl<sub>2</sub>. Plug down at 4:15 a.m. 8/8/79. Circulated 40 sx. Pressured up to 1000#, held okay. WOC.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Richard O. Dimit

TITLE

V-P, Production

DATE

August 13, 1979

(This space for Federal or State office use)


APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

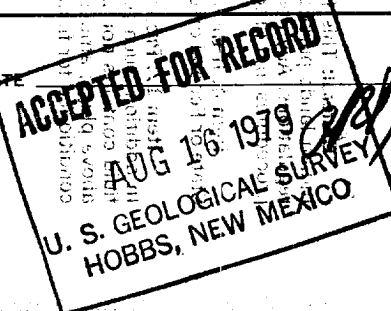

RECEIVED  
AUG 21 1970  
O.C.D. HOBBS, OFFICE

RECEIVED  
AUG 21 1970  
O.C.D. HOBBS, OFFICE