


Proposed Plug & Abandonment

K. B. Elevation - 4982'


Ground Elevation - 4972'

25 SX plug @ surface

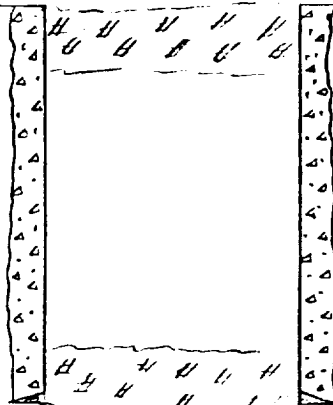

35 SX plug (1832'-1700')

25 SX cement plug
(50' inside casing stub, 50' outside)



12 1/4" O.H. 8 5/8" 24 16/H casing set
@ 1782' with 550 SX Hall. Lite
followed by 200 SX class "C" w/
2% COLL. Cement Circulated

Casing Stub - To be determined
by free point.

TOC calculated to be @ 3500'

25 SX plug (4283-3914')



Perfs: 4112'-17' (10 holes)

Perfs: 4198-4204 (18 holes), 4208-10 (2 holes)

PBTD - 4283'

7 1/8" O.H. 4 1/2" 10.5 16/H casing set
@ 4331' Cemented with 250 SX
Pozmix A w/ 2% gel, 0.75% CFX-2,
8 # Salt.