

N. M. OIL CONS. COMMISSION
P. O. BOX 1980
HOBBS, NM 88241-1980
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other SWD	5. Lease Designation and Serial No. 30-12852
2. Name of Operator H. L. Brown, Jr.	6. If Indian, Allottee or Tribe Name
3. Address and Telephone No. P O Box 2237, Midland, TX 79702-2237 (915) 683-5216	7. If Unit or CA, Agreement Designation
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Unit J, 1980' FSL, 1980' FEL, Section 27, T-7-S, R-37-E, NMPM	8. Well Name and No. Holly "27" Fed #1
	9. API Well No. 30-041-20530
	10. Field and Pool, or Exploratory Area San Andres
	11. County or Parish, State Roosevelt Co, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input type="checkbox"/> Other
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Currently Have: 13 3/8" csg set @ 380', cmt circulated
8 5/8" csg set @ 3751', w/TOC @ 350' by temp survey
4 1/2" csg set @ 4626', w/TOC @ 3759' by Cmt Bond Log
PBSD @ 4870'
Perfs @ 4348'-4844'

Plugging Proposal: CIBP @ 4300'; cap w/150' of cmt; free point, cut & retrieve + 3700' of
4 1/2" csg; circ hole w/mud; spot 150' cmt plug from 3800' to 3650'; Spot
120' cmt plug from 2310' to 2190'; spot 100' cmt plug from 455' to 355';
shoot sqz holes @ 70', circ cmt down csg and up annulus until cmt circula

Estimated Start Date: 3/1/96

14. I hereby certify that the foregoing is true and correct

Signed

Kerry Meise

Title

Kerry Meise
Operations Engineer

Date


1-24-96

(This space for Federal or State office use)

Approved by

Title

Conditions of approval, if any:

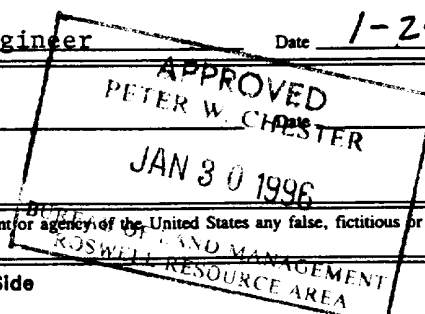


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

Holly Federal "27" W. No. 1

Roosevelt County, New Mexico

Current Wellbore

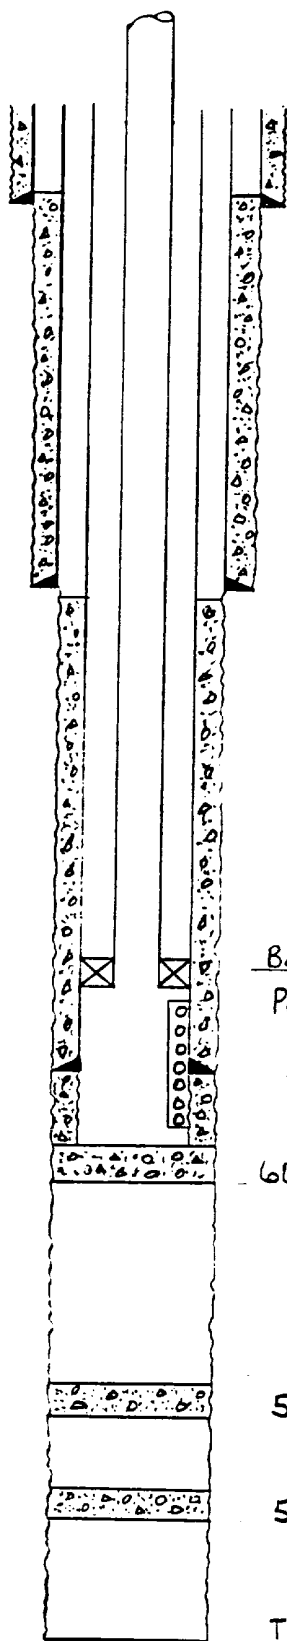

17 1/2" hole

13 3/8", 48#, H 40 @ 380'
385 sxs - cmt. circ.

12 1/4" hole

8 5/8", 24#; 32#, K55 @ 3751'
1000 sxs - Lite } did not circ.
200 sxs - "C" }
TOC @ 350' by Temp Survey

7 7/8" hole

Baker Model AD-1 pkr @ 4315'
Perfs: 4348' - 4844'

4 1/2", 10.5#, K-55 @ 4626'
450 sxs 50/50 Poz
TOC @ 3759' by Bond Log
60 sxs "C" 5100' - 4870'

50 sxs "H" 6295' - 6195'

50 sxs "H" 7045' - 6895'


TD: 9202'

Tbg String
137 jts 2 3/8", J-55
ceramic coated (internally)

Jan 20 10 34 AM '55
HOLLY
FEDERAL

Holly Federal "27" u. No. 1
Roosevelt County, New Mexico

Proposed P & A

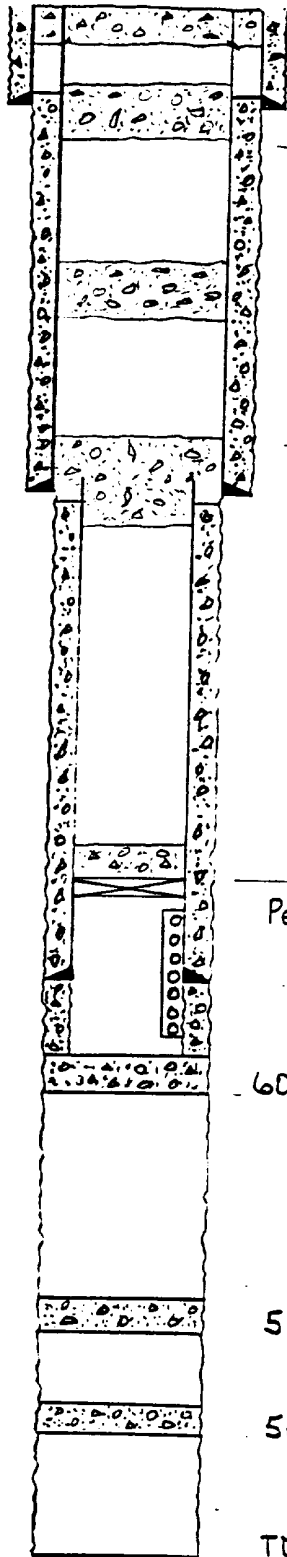

17 1/2" hole

Perf @ 70', circ cmt to surface

13 3/8", 48#, H 40 @ 380'
385 sxs - cmt. circ.

100' cmt from 455'-355'

12 1/4" hole

120' cmt from 2310'-2190'

150' cmt from 3800'-3650'

8 5/8", 24#; 32#, K55 @ 3751'
1000 sxs - Lite } did not circ.
200 sxs - "C" }
TOC @ 350' by Temp Survey

cut csg ± 3700'

7 7/8" hole

CIBP @ 4300' w/ 150' cmt

Perfs: 4348'-4844'

4 1/2", 10.5#, K-55 @ 4626'

450 sxs 50/50 Poz

TOC @ 3759' by Bond Log

60 sxs "C" 5100'-4870'

50 sxs "H" 6295'-6195'

50 sxs "H" 7045'-6895'

TD: 9202'

Tbg String

137 jts 2 3/8", J-55
ceramic coated (internally)