

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well  gas well  other

2. NAME OF OPERATOR  
Bliss Petroleum, Inc.

3. ADDRESS OF OPERATOR  
P. O. Box 1817, Hobbs, N.M. 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
660' FNL & 660' FWL OF Section 31


AT SURFACE:  
AT TCP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

- TEST WATER SHUT-OFF
- FRACTURE TREAT
- SHOOT OR ACIDIZE
- REPAIR WELL
- PULL OR ALTER CASING
- MULTIPLE COMPLETE
- CHANGE ZONES
- ABANDON\*
- (other) Set Intern. Casing String

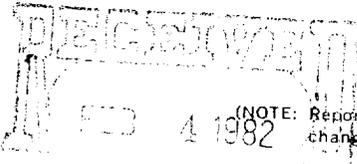

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

U.S. GEOLOGICAL SURVEY  
ROOSEVELT, NEW MEXICO

5. LEASE  
NM 15332

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
~~FE~~ Federal PB

9. WELL NO.  
1

10. FIELD OR WILDCAT NAME  
Undesignated

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 31, T8S, R38E

12. COUNTY OR PARISH  
Roosevelt

13. STATE  
N.M.

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
KB-3995'

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Ran 1 Halliburton 8 5/8" Guide Shoe	1.10'
50 jts. - 8 5/8", 32#, J-55, ST&C New Casing	1979.91'
53 jts. 8 5/8", 24#, J-55, ST&C New Casing	2119.91'
3 jts. 8 5/8", 32#, J-55, ST&C New Casing	119.41'
Total Run	4219.56'
Set at	4197.00' KB

Cemented w/ 1550 sx. Western PS Lite w/ 1/4 #/sx. Cello-Seal; followed w/ 300 sx. Class "C" neat cmt. Circ. 100 sx. cmt. to surface. Bumped plug at 8:00 P.M. on 1-27-82. Pressure test casing to 1500 psi for 30 min. before drilling out. Held ok.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Paul Bliss TITLE President DATE 2-2-82

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

FEB 16 1982

U.S. GEOLOGICAL SURVEY  
ROOSEVELT, NEW MEXICO  
See Instructions on Reverse Side