

N. M. OIL CONS. COMMISSION

P. O. BOX 1980

HOBBS, NEW MEXICO 88240

Form 9-331
(May 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 4039-B

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Will 693 Ltd.

9. WELL NO.

4

10. FIELD AND POOL, OR WILDCAT

Vada Penn

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 34, T-8-S, R-35-E

12. COUNTY OR PARISH 13. STATE

Roosevelt

N.M.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Petroleum Production Management, Inc.

3. ADDRESS OF OPERATOR

Suite 200/Sutton Place Bldg. Wichita, Kansas 67202

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

1830' FSL and 1900' FEL, Sec. 34, T-8-S, R-35-E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4174.6 GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐(Other) ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETION ☐ABANDON* ☐CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐FRACTURE TREATMENT ☐SHOOTING OR ACIDIZING ☐(Other) Drilling Progress Report ☒REPAIRING WELL ☐ALTERING CASING ☐ABANDONMENT* ☐(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-24-90


Moved in and rigged up Meenar Well Service. Drilled out plug, float collar and 30' of cement. 9808'.

10-25-90

Logged from 9788' to 8800' and from 5150' to 4600'. CN, GR, CCL. Perforated interval 8943' - 8919'.

10-26-90

Acidized Abo perforations 8943' - 8919' with 1500 gallons of 15% MCA acid.

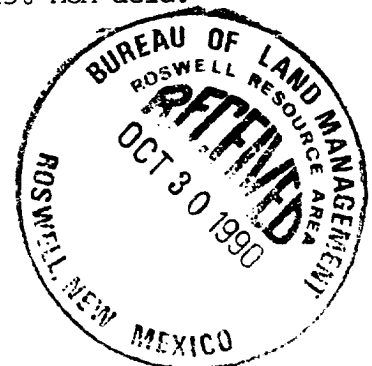

18. I hereby certify that the foregoing is true and correct

SIGNED

Gary HochmanTITLE District Superintendent

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE 10-29-90PETER W. CHESTER

DATE

NOV 19 1990BUREAU OF LAND MANAGEMENT
ROSWELL RESOURCE AREA

*See Instructions on Reverse Side

RECEIVED

NOV 21 1966

NOV 21 1966