

N. M. OIL CONS. COMMISSION
P. O. BOX 1989
HOBBS, NEW MEXICO 88240
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
NM 51837

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

V. G. Kinahan Fed #1

9. API Well No.

30-005-00504

10. Field and Pool, or Exploratory Area

Cedar Point Wolfcamp

11. County or Parish, State

Chaves, NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Matador Operating Company

3. Address and Telephone No.

415 W. Wall, Ste 1101, Midland, TX 79701, (915) 687-5955

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660 FSL; 1980 FEL

✓ Sec 20-T15S-R30E

Unit D

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☒ Recompletion

☒ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off


☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Propose to set CIBP w/ 35' cement on top @ 8000'. Perforate 5-1/2" casing at 5750' (Abo) w/ 2 holes (.5"). Set retainer at ± 5700' and place 75 sx Class C cement w/ 2% CaCl₂, 1/4#/sk Flocele, and 2.5#/sk salt behind 5-1/2" casing. Pull up hole and perforate 5-1/2" casing @ 2400' w/ 2 holes (.5"). Set retainer @ 2350 and place 130 sx Class C cement w/ 2% CaCl₂ behind 5-1/2" casing. Proceed to perforate through 5-1/2" and 8-5/8" casing @ 2176-2184, 2191-2210, and 2212-2217. 4 JSPF in Queen formation. Swab to evaluate w/ pkr @ 2100'. Stimulate as dictated by results of swab test.

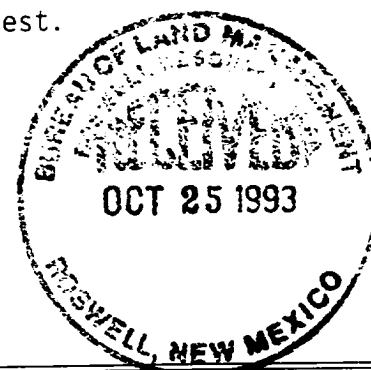

14. I hereby certify that the foregoing is true and correct

Signed

Title Operations Manager

Date

10-22-93

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

NOV 3 1993

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side