


(SUBMIT IN TRIPLICATE)

Land Office Artesia  
Lease No. 1C-06932 A  
Unit Federal-IndiaUNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		<del>REPAIR</del>	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 30, 1955

Well No. 2 is located 660 ft. from N line and 660 ft. from E line of sec. 5N/2 5 13S T1E 1800W  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Driskay Queen Chaves New Mexico  
(Field) (County or Subdivision) (State or Territory)The elevation of the derrick floor above sea level is \* ft.

\*To be furnished at a later date.

## DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

## Casing Design:

275' - 8 5/8" OD 2 1/2 J-55 STBC Casing, cemented w/210 sz cement.

200' - 5 1/2" OD 1 1/2 J-55 STBC Casing, cemented w/150 sz cement.

## Well Program:

Drill with water and native mud to approximately 3050'; displace mud with oil emulsion mud or cement oil and drill pay section to approximately 3150' TD.

## Drilling Plans:

Drill well with rotary to approximately 275' and set 8 5/8" OD casing. Drill with rotary to TD of approximately 3150'. Run radioactivity logs. Set 5 1/2" OD casing at approximately 3100' in substrate immediately above pay section and cement. Drill out cement and packoff shoe and complete in open hole. Run 2 3/8" OD tubing to 3100' and seal well in. Run rods w/pump and set pumping unit for completion as pumping well.

## Estimated depth to the top of sandstone sections:

Sandstone 3150'; Yates 2800'; Cement 3100'.

I understand that this plan or work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Ada Oil CompanyAddress Box 126, Midland, TexasBy G. L. Fly, Jr. (G. L. Fly, Jr.)Title Chief Clerk




# WELL LOCATION SURVEY PLAT

OPERATOR ADA OIL CO.

LEASE FEDERAL ERWIN

WELL NO. 2

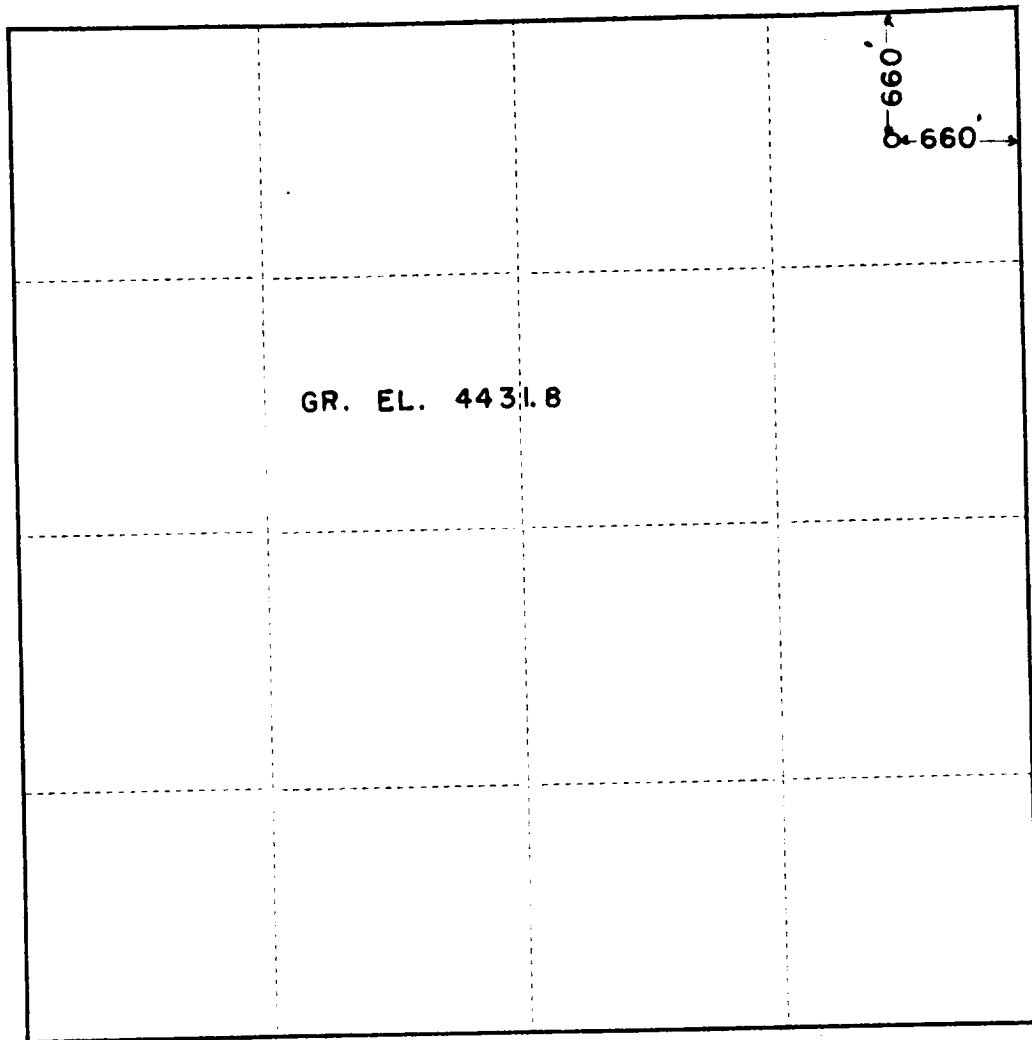

SEC. 5, TWP. 15 S., RGE. 31 E., N.M.P.M.

I HEREBY CERTIFY THAT THIS PLAT WAS MADE  
FROM NOTES TAKEN IN THE FIELD BY ME AND  
THAT THE SAME IS TRUE AND CORRECT TO THE  
BEST OF MY KNOWLEDGE AND BELIEF.

*John W West*

JOHN W. WEST, PE & LS NO. 676