

IF COPIES RECEIVED		
DISTRIBUTION		
T A F E		
E		
S.G.S.		
AND OFFICE		
PERATOR		

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease	
State <input checked="" type="checkbox"/>	Fee <input type="checkbox"/>
5. State Oil & Gas Lease No. E-2855	
7. Unit Agreement Name D. Q. S. U.	
8. Farm or Lease Name Tract 32	
9. Well No. 2	
10. Field and Pool, or Wildcat Caprock Queen	
12. County Chaves	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

OIL WELL <input type="checkbox"/>	GAS WELL <input type="checkbox"/>	OTHER- Water Injection
2. Name of Operator Cities Service Oil Company		
3. Address of Operator Box 69 - Hobbs, New Mexico 88240		
4. Location of Well		
UNIT LETTER B	660	FEET FROM THE North LINE AND 1980 FEET FROM
THE East LINE, SECTION 2	TOWNSHIP 14S	RANGE 31E NMPM.

15. Elevation (Show whether DF, RT, GR, etc.) 4405 GR

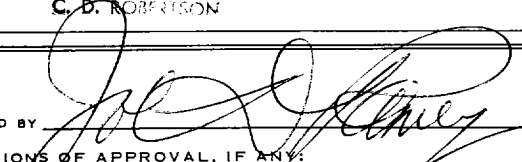
16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>
OTHER <input type="checkbox"/>	OTHER <input type="checkbox"/>
PLUG AND ABANDON <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
CHANGE PLANS <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

We propose to plug and abandon the above well in the following manner:

1. Set C1 bridge plug in casing just above open hole. (5½' set @ 3066 w/1550 sxs)
2. Set 25 sack cement plug on top of bridge plug.
3. Load hole with mud laden fluid.
4. Set 10 sack cement surface plug with a 4' dry hole marker.
5. Clean location of all debris and equipment.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

ORIGINAL SIGNED C. D. ROBERTSON	TITLE District Admin. Supervisor	DATE 5/4/70
APPROVED BY 		
TITLE SUPERVISOR DISTRICT		
DATE MAY 7 1970		
CONDITIONS OF APPROVAL, IF ANY:		

RECEIVED

MAY 6 1970

OIL CONSERVATION COMM.
NOBBS, M. L.