

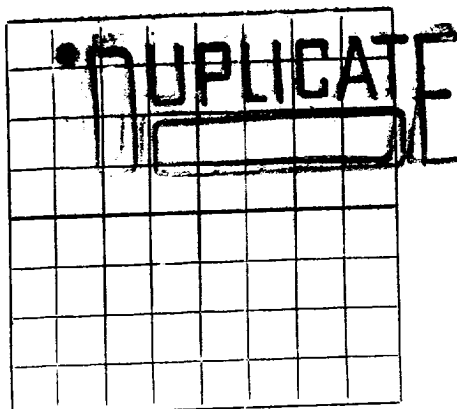
NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

JUL 6 1953

Mail to District Office, Oil Conservation Commission, Santa Fe, New Mexico, not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

OIL CONSERVATION COMMISSION
HOBBBS OFFICEAREA 640 ACRES
LOCATE WELL CORRECTLY

Neville G. Perrose, Inc.

(Company or Operator)

Stella Zimmerman

(Lease)

Well No. 1 in NW 1/4 of NW 15, T. 14S, R. 31E, NMPM.

Undesignated

Pool,

Chaves

County.

Well is 660 feet from North line and 660 feet from West line

of Section 15

If State Land the Oil and Gas Lease No. is

Drilling Commenced 4/25/53, 19... Drilling was Completed 6/3/53, 19...

Name of Drilling Contractor Costa Drilling Company

Address San Angelo, Texas

Elevation above sea level at Top of Tubing Head 4245
present, 19... The information given is to be kept confidential until

OIL SANDS OR ZONES

No. 1, from None to
No. 2, from to
No. 3, from to
No. 4, from to
No. 5, from to
No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
5 1/2"	13.5	New	2868	Texas Pattern	--	None	Prod. String

MUDDING AND CEMENTING RECORD

MUDDING AND CEMENTING RECORD						
SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	5 1/2"	2868	100	Parkins Plug	--	--

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Production - 34 bbls oil, 1 hr.

Result of Production Stimulation Sandfree with 3000 gal (2 1/2 gal sand)

Swabbed and flowed 34 bbls oil. Trace water / 24 hrs

Depth Cleaned Out 2900'

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 4139 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing June 23 33, 19 34

OIL WELL: The production during the first 24 hours was 34 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 1180	T. Devonian	T. Ojo Alamo	
T. Salt	T. Silurian	T. Kirtland-Fruitland	
B. Red Sand 2871	T. Montoya	T. Farmington	
T. Yates	T. Simpson	T. Pictured Cliffs	
T. 7 Rivers	T. McKee	T. Menefee	
T. Queen	T. Ellenburger	T. Point Lookout	
T. Grayburg	T. Gr. Wash	T. Mancos	
T. San Andres 3540	T. Granite	T. Dakota	
T. Glorieta	T.	T. Morrison	
T. Drinkard	T.	T. Penn	
T. Tubbs	T.	T.	
T. Abo	T.	T.	
T. Penn	T.	T.	
T. Miss	T.	T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	45		Sand	2725	2755		Anhydrite, shale
45	1170		Red Bed	2755	2775		Anhydrite shell
1170	1263		Red Bed & Anhydrite	2775	2815		Anhydrite
1263	1300		Red Bed	2815	2850		Anhydrite, shale
1300	1305		Salt	2850	2858		Anhydrite
1305	1415		Anhydrite, Salt	2858	2873		Red Sand
1415	1955		Salt	2873	2877		Grey Sand
1955	1970		Anhydrite	2877	2880		Queen Sand
1970	2030		Salt, Red Rock & Anhydrite Shells	2880	2885		Sand
2030	2075		Anhydrite, Salt	2885	2895		Sand, Anhydrite
2075	2100		Anhydrite, Red Bed	2895	2913		Anhydrite
2100	2155		Red Shale	2913	2955		Anhydrite & Shale
2155	2205		Anhydrite, Red Sandy Shale	2955	2995		Anhydrite, Red Shale
2205	2222		Yates Sand & Brown Shale	2995	3030		Shale
2250	2275		Red Shale	3030	3080		Anhydrite & Red Sandy Shale
2275	2395		Anhydrite	3080	3120		Red Shale Sandy
2395	2435		Anhydrite, Brown Shale	3120	3155		Shale
2435	2635		Anhydrite	3155	3160		Anhydrite
2635	2660		Anhydrite, Blue Shale	3160	3205		Anhydrite & Shale Sandy
2660	2675		Red Sand	3205	3255		Anhydrite
2675	2725		Red Rock & Anhydrite shells	3255	3275		Shale Br.
				3275	3320		Anhydrite & Sandy Shale

FORMATION RECORD Continued.

3320	3355	Anhydrite, Shale
3355	3400	Anhydrite & Shale
3400	3485	Anhydrite & Sandy Shale
3485	3545	Anhydrite
3545	3835	Lime
3835	3860	Lime, Grey
3860	3885	Lime
3885	3895	Lime Shale