

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease	
State <input type="checkbox"/>	Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		7. Unit Agreement Name D.Q.S.U.
2. Name of Operator Cities Service Oil Company		8. Farm or Lease Name Tract 50
3. Address of Operator Box 69 - Hobbs, New Mexico 88240		9. Well No. 1
4. Location of Well UNIT LETTER G 1980 FEET FROM THE North LINE AND 1980 FEET FROM THE East LINE, SECTION 15 TOWNSHIP 14S RANGE 31E NMPM.		10. Field and Pool, or Wildcat Caprock Queen
15. Elevation (Show whether DF, RT, GR, etc.) 4255 GR		12. County Chaves

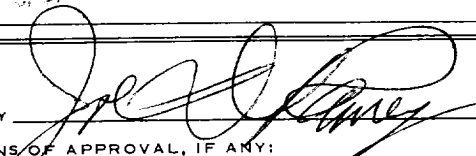
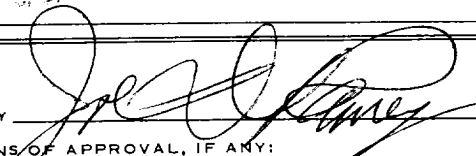
16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input type="checkbox"/>
OTHER <input type="checkbox"/>	OTHER <input type="checkbox"/>
PLUG AND ABANDON <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
CHANGE PLANS <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

We propose to plug and abandon the above well in the following manner:

1. Set CI bridge plug in casing just above open hole. (7" set @ 2901' w/125 sax)
2. Set 25 sx cement plug on top of bridge plug.
3. Load hole with mud laden fluid.
4. Set 10 sack cement surface plug with a 4" dry hole marker.
5. Clean location of all debris and equipment.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED	TITLE	DATE
	District Admin. Supervisor	5/4/70
APPROVED BY	TITLE	DATE
	SUPERVISOR DISTRICT 1	MAY 7 1970
CONDITIONS OF APPROVAL, IF ANY:		

U.S. DEPARTMENT OF COMMERCE
WASHINGTON, D. C.

MAY 6 1970

RECEIVED

WVA