

NO. OF COPIES RECEIVED		
DISTRIBUTION		
SANTA FE		
FILE		
U.S.G.S.		
LAND OFFICE		
OPERATOR		

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease	
State <input type="checkbox"/>	Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		7. Unit Agreement Name D.Q.S.U.	
2. Name of Operator Cities Service Oil Company		8. Farm or Lease Name Tract 43	
3. Address of Operator Box 69 - Hobbs, New Mexico		9. Well No. 3	
4. Location of Well UNIT LETTER J ²³¹⁰ 1986 FEET FROM THE South LINE AND ²³¹⁰ 1986 FEET FROM THE East LINE, SECTION 22 TOWNSHIP 14S RANGE 31E NMPM.		10. Field and Pool, or Wildcat Caprock Queen	
15. Elevation (Show whether DF, RT, GR, etc.) -		12. County Chaves	

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

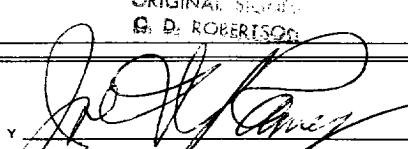
NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

We propose to plug and abandon the above well in the following manner:

1. Set CI bridge plug in casing just above open hole (7" set @ 3094 w/100 sacks)
2. Set 25 sack cement plug on top of bridge plug.
3. Load hole with mud laden fluid.
4. Set 10 sack cement surface plug with a 4" dry hole marker.
5. Clean location of all debris and equipment.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

ORIGINAL SIGNED G. D. ROBERTSON	TITLE District Admin. Supervisor	DATE 5/22/70
	TITLE SUPERVISOR DISTRICT	DATE MAY 25 1970
OF APPROVAL, IF ANY		

RECEIVED

MAY 20 1970

OIL CONSERVATION COMM.
ROCKS, N. C.