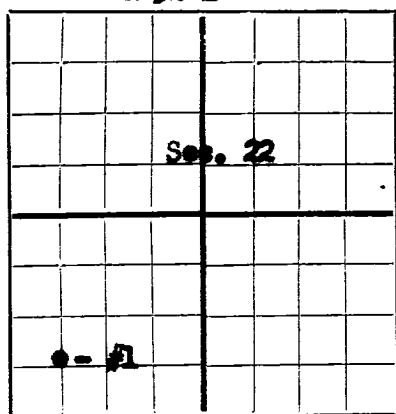


R-32-E

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Amarada Petroleum Corporation

Drawer D, Monument, New Mexico

Company or Operator

Address

State R "A"

Well No.

1

in C/SW/4 SW/4 of Sec.

22

T. 8-S

Lease

R. 32-E, N. M. P. M. Wildcat

Field,

1st

County.

Well is 660' feet North of the North line and 660' feet East of the East line of Section 22

If State land the oil and gas lease is No. R-3002 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Amarada Petroleum Corporation Address P.O. Box 2040, Tulsa 2, Okla.

Drilling commenced April 25, 1950 Drilling was completed October 2, 1950

Name of drilling contractor Roman Drilling Company Address Fort Worth, Texas

Elevation above sea level at top of casing 4373 feet

This information given is to be kept confidential until Not Confidential 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet

No. 2, from to feet

No. 3, from to feet

No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8"	36#	S/J	Weld	338'	Float				
8-5/8"	32#	8-Rd	S.S.	3485'	Guide	Pulled loose in collar in 5th joint & recovered 178.33' of casing before well was abandoned.			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13-3/8"	338'	200	Halliburton		
11"	8-5/8"	3475'	1000	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
			None			

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 11621 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dry Hole — Plugged & Abandoned

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in

EMPLOYEES

B. L. McDonald Driller Pruitt Guest Driller

Roy Lynch Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th

Monument, New Mexico October 10, 1950

day of October, 1950

Name

Position

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	120	120	Red Beds
120	2796	2676	Anhydrite & Salt
2796	3380	584	Limestone
3380	4520	1140	Dolomite & Limestone
4520	4640	120	Dolomite & Anhydrite
4640	4700	60	Dolomite, Anhydrite & Sand
4700	5350	650	Dolomite, Salt & Shale
5350	5620	270	Limestone
5620	5840	220	Limestone, Dolomite & Anhydrite
5840	7135	1295	Shale
7135	8065	930	Shale, Dolomite & Chert
8065	8460	395	Limestone & Shale
8460	10210	1750	Limestone & Sand
10210	10360	150	Limestone, Sand & Shale
10360	10510	150	Limestone & Chert
10510	10810	300	Limestone & Shale
10810	10920	110	Limestone, Shale & Sand
10920	11018	98	Dolomite
11018	11262	244	Dolomite & Chert
11262	11410	148	Dolomite & Sand
11410	11544	134	Dolomite, Chert & Arkose
11544	11594	50	Granite Wash
	11594		Total Depth

GEOLOGICAL DATA - SCHLUMBERGER TOPS

Top Anhydrite	1635'
Top Salt	1710'
Base Salt	2190'
Top Yates	2212'
Top San Andres	3380'
Base San Andres	4784'
Top Clear Fork	5634'
Top Abe	7125'
Top Wolfcamp	8026'
Top Pennsylvanian	8420'
Top Mississippian	10370'
Top Devonian	11005'
Base	11594'

SLOPE TESTS

385'	3 Deg.	9485'	1 Deg.
570'	2 "	9510'	3/4 Deg.
586'	2 1/2 Deg.	9620'	1/2 Deg.
1020	1-3/4 Deg.	9780'	1/2 Deg.
1130'	1-1/2 Deg.	9890'	1/2 Deg.
1320'	1-1/4 Deg.	10050'	1/2 Deg.
1684'	1/2 Deg.	10116'	1/2 Deg.
1884'	1/2 Deg.	10360'	3/4 Deg.
2755'	1-1/2 Deg.	10488'	1/2 Deg.
2900'	1-1/4 Deg.	10620'	3/4 Deg.
3087'	3/4 Deg.	10680'	1 Deg.
4366'	1/4 Deg.	10750'	1 Deg.
4640'	1/2 Deg.	10850'	1-1/4 Deg.
5104'	1/4 Deg.	10925'	1-1/4 Deg.
5325'	1/4 Deg.	10998'	1-3/4 Deg.
5420'	1/2 Deg.	11134'	1-1/4 Deg.
5905'	1/2 Deg.	11270'	1-3/4 Deg.
6029'	1/2 Deg.	11310'	1-3/4 Deg.
6335'	1/2 Deg.	11364'	1-1/4 Deg.
6551'	1-1/4 Deg.	11450'	1-1/4 Deg.
6636'	1 Deg.		
7173'	3/4 Deg.		
7363'	1/4 Deg.		
7590'	1/2 Deg.		
7685'	3/4 Deg.		
7790'	0		
7887'	1/2 Deg.		
7945'	1/2 Deg.		
8020'	1/2 Deg.		
8135'	3/4 Deg.		
8176'	1/2 Deg.		
8240'	3/4 Deg.		
8280'	1/2 Deg.		
8420'	1/2 Deg.		
8516'	1/4 Deg.		
8815'	3/4 Deg.		
8930'	1-1/4 Deg.		
9007'	1/2 Deg.		
9328'	1/2 Deg.		