

N.M. OIL CONS. COMMISSION

P.O. BOX 1980

HOBBS, NM 88241
UNITED STATES

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Mack Energy Corporation

3. Address and Telephone No.

P.O. Box 960 Artesia, New Mexico 88211-0960 (505)748-1288

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec. 5 T-15-S R-30-E 2310 FNL 1650 FWL Unit F

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: September 30, 1990

5. Lease Designation and Serial No.

NM0554964

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Martha Federal #1

9. API Well No.

30-005-20321

10. Field and Pool, or Exploratory Area

Vest Ranch Queen Assoc.

11. County or Parish, State

Chaves, N.M.

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 1) Set 5 1/2 C.I.B.P. at 1950' cap W/35' cement
- 2) Load hole W/mud
- 3) Spot 25 sacks cement across base of salt 1400'
- 4) Perforate 5 1/2 casing at top of fsalt 575' squeeze w/70 sacks cement and tag this plug will also cover the 8 5/8 shoe at 396'
- 5) Perforate 5 1/2 casing at 50' circulate cement to surface between 5 1/2 and 8 5/8 leaving 5 1/2 full

14. I hereby certify that the foregoing is true and correct

Signed Raymond McDonald

Title Supervisor

(This space for Federal or State office use)


Approved by _____

Title _____

Conditions of approval, if any: _____


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

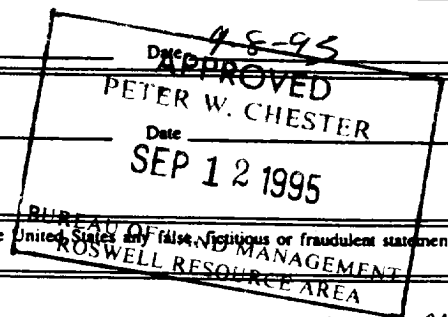

Before

MACK Energy Corporation MARtha Fed. #1

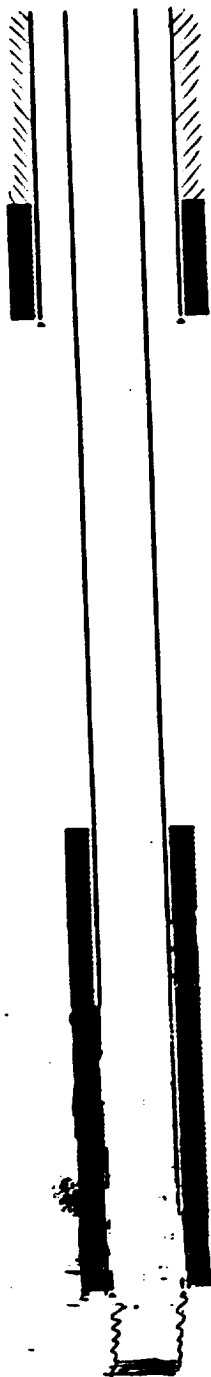

8 3/8 396' cmt. w/ 50% cement

Top Salt 525'

T.O.C. 1245'

Base of Salt 1350'

5 1/2 2015' cmt. w/ 150% cement T.O.C. 1245'

2090 PBTD

2100' T.D.

Open hole Pen. Functions 2075'-2081'

RECEIVED
SEP 14 1995
OCD HOBBES
OFFICE