

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other

2. NAME OF OPERATOR

TEXACO INC.

3. ADDRESS OF OPERATOR

P.O. BOX 728, HOBBS, N.M. 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 660 FNL & 990 FEL

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

(other) plugged back

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☒

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Rig up. Installed wellhead and BOP. POH w/tbg.
2. Ran PFC log 9300-10,300'.
3. Set CIBP at 10,200' and dumped 3 1/2 sx class "H" cmt on plug. New PBTD 10,160'.
4. Ran 5 1/2" pkr. P/15 sx class "C" cmt w/4% CACL. DOC 20-80'.
5. Ran 317 jts. 2 3/8" tbg. OE to 10,060'. Circ. 250 BW. Spotted 500 gal. 10%. Ran and set 313 jts. tbg. at 9940' w/pkr. at 9936'. Perfed 5 1/2" csg. w/2 SPF 10,024-038', (29 holes). Well presently shut in. SI- NG. 7/30/85.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct


SIGNED R. Frank Gray TITLE Dist. Opr. Mgr. DATE 8/15/85

APPROVED BY _____

CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

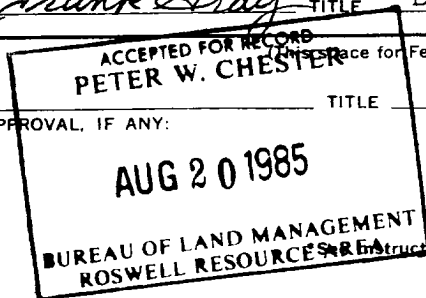

Instructions on Reverse Side

11