

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE  
(Other instructions on  
reverse side)

Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 0271104-B

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

TOLPAT FEDERAL "B"

9. WELL NO.

#1

10. FIELD AND POOL, OR WILDCAT

WILDCAT

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

SEC. 28-10S-30E-NMPM

12. COUNTY OR PARISH

CHAVES

13. STATE

NEW MEXICO

1.

OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

JACK L. MCCLELLAN

3. ADDRESS OF OPERATOR

Box 848 - ROSWELL, NEW MEXICO 88201

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)

At surface

660' FNL & 660' FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4058.7 GR

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

PULL OR ALTER CASING

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

SURFACE CASING

REPAIRING WELL

ALTERING CASING

ABANDONMENT\*

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input checked="" type="checkbox"/>

(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

SPUDDER WITH RAT HOLE MACHINE 5-25-72.

STARTED DRILLING WITH ROTARY TOOLS 7:00 P.M. 5-28-72.

DRILLED TO 340' AND SET 8 5/8" 20# NEW CSG AT 336'.

HALLIBURTON CEMENTED WITH 75 SKS LIGHTWEIGHT CEMENT AND 75 SKS OF CLASS H CEMENT FOR A TOTAL OF 150 SKS WITH 3% CA CL AND 1/4# FLOCELE PER SK. CIRCULATED 20 SKS. USED 2 CENTRALIZERS

5-30-72 - TESTED CSG AND B.O.P. WITH 1000# AND HELD O.K. AND RESUMED DRILLING.

RECEIVED

RECEIVED

JUN 6 1972

MAY 31 1972

U. S. GEOLOGICAL SURVEY  
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

*W. L. Beekman*

TITLE

PRODUCTION  
SUPERINTENDENT

DATE

MAY 30, 1972

(This space for Federal or State approval, if any)


APPROVED BY

COMMISSIONER OF APPROVAL, IF ANY:

TITLE

DATE

\*See Instructions on Reverse Side

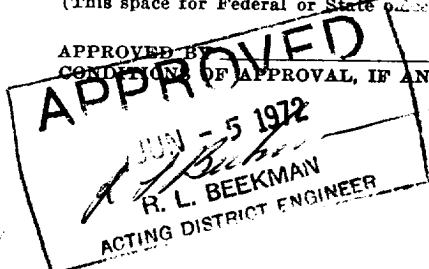

RECEIVED  
JUN 15 1972  
OIL CONSERVATION COMM.  
HOBBS, N. M.

RECEIVED

JUN 15 1972  
OIL CONSERVATION COMM.  
HOBBS, N. M.