

#1 Burns-Federal

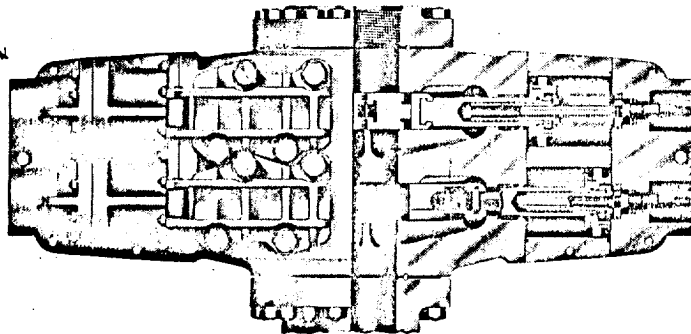


Fig. 3

Shaffer Type B Hydraulic Double Blowout Preventer—Sectional View

Above is Blow out preventer that will be used on above well.

Preventer is 3000# working pressure and will be tested before drilling plug on surface casing.

It is hydraulic operated.

DEC 1 31972  
U.S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
ALBUQUERQUE, NEW MEXICO