

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐  
well well other
2. NAME OF OPERATOR  
El Ran, Inc.
3. ADDRESS OF OPERATOR  
1603 Broadway, Lubbock, Texas 79401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1980 FSL - 330 FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐

SUBSEQUENT REPORT OF:

- ☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

(other) Cementing Casing Report

RECEIVED

JUN 6 1979

U. S. GEOLOGICAL SURVEY  
HOBBS, NEW MEXICO

Note: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

8 5/8" - 23# Casing was set at 1697 and cemented with 550 sacks, circulated 50 sacks. Blow-out preventor was installed and 1200# pressure was applied to casing. Held for 20 minutes. 4 1/2, 10.5 casing was set at 4457' and cemented with 225 sacks.

SPUDED 5-18-79

Subsurface Safety Valve: Manu. and Type

Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

*Will Kane*

TITLE

President

DATE

June 6, 1979

(This space for Federal or State office use)


APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

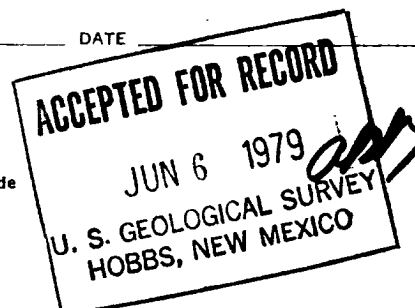

RECEIVED

JUN 12 1979

OIL CONSERVATION COMM.  
HOBBBS. N. M.