

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR
Yates Petroleum Corporation
3. ADDRESS OF OPERATOR
207 South 4th St., Artesia, NM 88210
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660 FNL & 1980 FWL, Sec. 1-8S-31E
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

- REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
- TEST WATER SHUT-OFF ☐
- FRACTURE TREAT ☐
- SHOOT OR ACIDIZE ☐
- REPAIR WELL ☐
- PULL OR ALTER CASING ☐
- MULTIPLE COMPLETE ☐
- CHANGE ZONES ☐
- ABANDON* ☐
- (other) Perforate, Treat

JAN 21 1983

O. C. D.
ARTESIA, OFFICE

5. LEASE
NM 0558018
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Union SI Federal
9. WELL NO.
2
10. FIELD OR WILDCAT NAME
Und. Tomahawk SA
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Unit C, Sec. 1-T8S-R31E
12. COUNTY OR PARISH Chaves 13. STATE NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
4377.6' GR

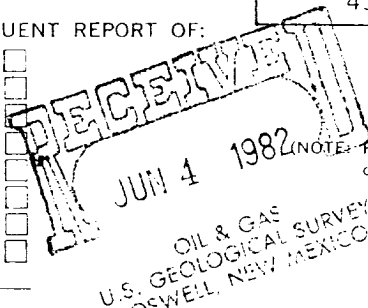

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spotted 2 bbls acid across P₃ zone. WIH and perforated 4102-55' w/10 .50" holes as follows: 4102, 05, 07½, 30, 32, 34, 42, 44, 51 & 55'. Acidized perforations 4102-55' w/1500 gallons 20% NEFE acid and 20 balls. Spotted 1-1/2 bbls acid across P₂ zone. WIH and perforated 4026-60' w/11 .50" holes as follows: 4026, 31, 34½, 37, 39, 41, 43, 52, 55, 58 & 60'. Acidized perforations 4026-60' w/1500 gallons 20% NEFE acid and 20 balls. Spotted 2 bbls acid across P₁ zone. WIH and perforated 3957-88' w/10 .50" holes as follows: 3957, 66, 71, 73, 75, 80, 82, 84, 86 & 88'. Acidized perforations 3957-88' w/1500 gallons 20% NEFE acid. Flowed back and swabbed well. Pumped back load. On test 6-2-82, well pumped 44 BOPD, 49 BWPD and 11 MCFGPD.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Peter W. Chester TITLE Engineering Secty DATE 6-2-82

ACCEPTED FOR RECORD (space for Federal or State office use)

APPROVED (Orig. Sgd.) PETER W. CHESTER TITLE _____ DATE _____
CONDITIONS OF APPROVAL _____

JAN 19 1983

MINERALS MANAGEMENT SERVICE
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side

RECEIVED

JAN 24 1983

R.C.D.
FBI OFFICE