

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

N. M. OIL CONS. COMMISSION
P. O. BOX 1020
ROSWELL, NEW MEXICO 88210

NM 31211
INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


- 1. oil well gas well other
- 2. NAME OF OPERATOR
Yates Petroleum Corporation
- 3. ADDRESS OF OPERATOR
207 South 4th St., Artesia, NM 88210
- 4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1650 FNL & 330 FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

- 7. UNIT AGREEMENT NAME
- 8. FARM OR LEASE NAME
Sun "UW" Federal
- 9. WELL NO.
2
- 10. FIELD OR WILDCAT NAME
Chaveroo SA
- 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Unit H, Sec. 10-T8S-R33E
- 12. COUNTY OR PARISH 13. STATE
Chaves NM
- 14. API NO.
- 15. ELEVATIONS (SHOW DE, KDB, AND WD)
4367.6' GR

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

- | | |
|---|-------------------------------------|
| REQUEST FOR APPROVAL TO: | SUBSEQUENT REPORT OF: |
| TEST WATER SHUT-OFF <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| FRACTURE TREAT <input type="checkbox"/> | <input type="checkbox"/> |
| SHOOT OR ACIDIZE <input type="checkbox"/> | <input type="checkbox"/> |
| REPAIR WELL <input type="checkbox"/> | <input type="checkbox"/> |
| PULL OR ALTER CASING <input type="checkbox"/> | <input type="checkbox"/> |
| MULTIPLE COMPLETE <input type="checkbox"/> | <input type="checkbox"/> |
| CHANGE ZONES <input type="checkbox"/> | <input type="checkbox"/> |
| ABANDON* <input type="checkbox"/> | <input type="checkbox"/> |
| (other) <input type="checkbox"/> | <input type="checkbox"/> |

(NOTE: Report results of multiple completion or zone change on Form 9-331-C)

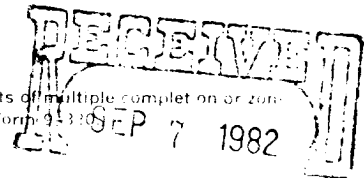

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent data including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Spudded a 14-3/4" hole 9:00 AM 8-31-82. Ran 10 joints of 10-3/4" 40.5# J-55 casing set at 385'. 1-Texas Pattern guide shoe set 385'. Insert flapper float set 345. Cemented w/300 sacks Class "C" w/2% CaCl. Compressive strength of cement - 1250 psi in 12 hours. PD 6:30 PM 8-13-82. Bumped plug to 1000 psi, released pressure and float held okay. Cement circulated 25 sacks to pit. WOC. Drilled out 12:30 PM 9-1-82. WOC 18 hours. Nippled up and tested to 1000 psi, okay. Reduced hole to 9-7/8". Drilled plug and resumed drilling.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Engineering Secty DATE 9-3-82

ACCEPTED FOR RECORD
(This space for Federal or State office use)
[Signature]
OCT 4 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

See Instructions on Reverse Side