

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO. 30-005-20935
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. LG-0493 **
7. Lease Name or Unit Agreement Name Pebble Queen
8. Well No. 1
9. Pool name or Wildcat Caprock Queen
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 4423' GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	2. Name of Operator Yates Drilling Company
3. Address of Operator 105 South 4th Street, Artesia, NM 88210	4. Well Location Unit Letter C : 990 Feet From The North Line and 1980 Feet From The West Line Section 11 Township 13S Range 31E NMPM Chaves County
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 4423' GR	

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
OTHER: <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
	CASING TEST AND CEMENT JOB <input type="checkbox"/>
	OTHER: <input type="checkbox"/>

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

We propose to plug and abandon, as follows:

1. Set CIBP at 2978' and dump 50' of cement on top.
2. Spot cement plug from 1987 to 2087 in 4 1/2" casing.
3. Perforate two holes in 4 1/2" casing at 1500'.
4. Set cement retainer at 1450' and squeeze with 50 sxs. of cement.
5. Dump 50' of cement on retainer.
6. Perforate two holes in 4 1/2" casing at 483'.
7. Set cement retainer at 433' and squeeze with 50 sxs. of cement.
8. Spot cement plug from surface to 50'.
9. Place regulation surface marker
10. Clean and clear location.

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

**This lease expired several years ago.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Joh. P. Sexton TITLE Petroleum Engineer DATE 7-12-93

TYPE OR PRINT NAME _____ TELEPHONE NO. _____

(This space for State Use) **ORIGINAL SIGNED BY JERRY SEXTON**
DISTRICT I SUPERVISOR


APPROVED BY _____ TITLE _____ DATE JUL 14 1993

CONDITIONS OF APPROVAL, IF ANY: _____

RECEIVED

JUL 13 1993

**OCD HOELS
OFFICE**

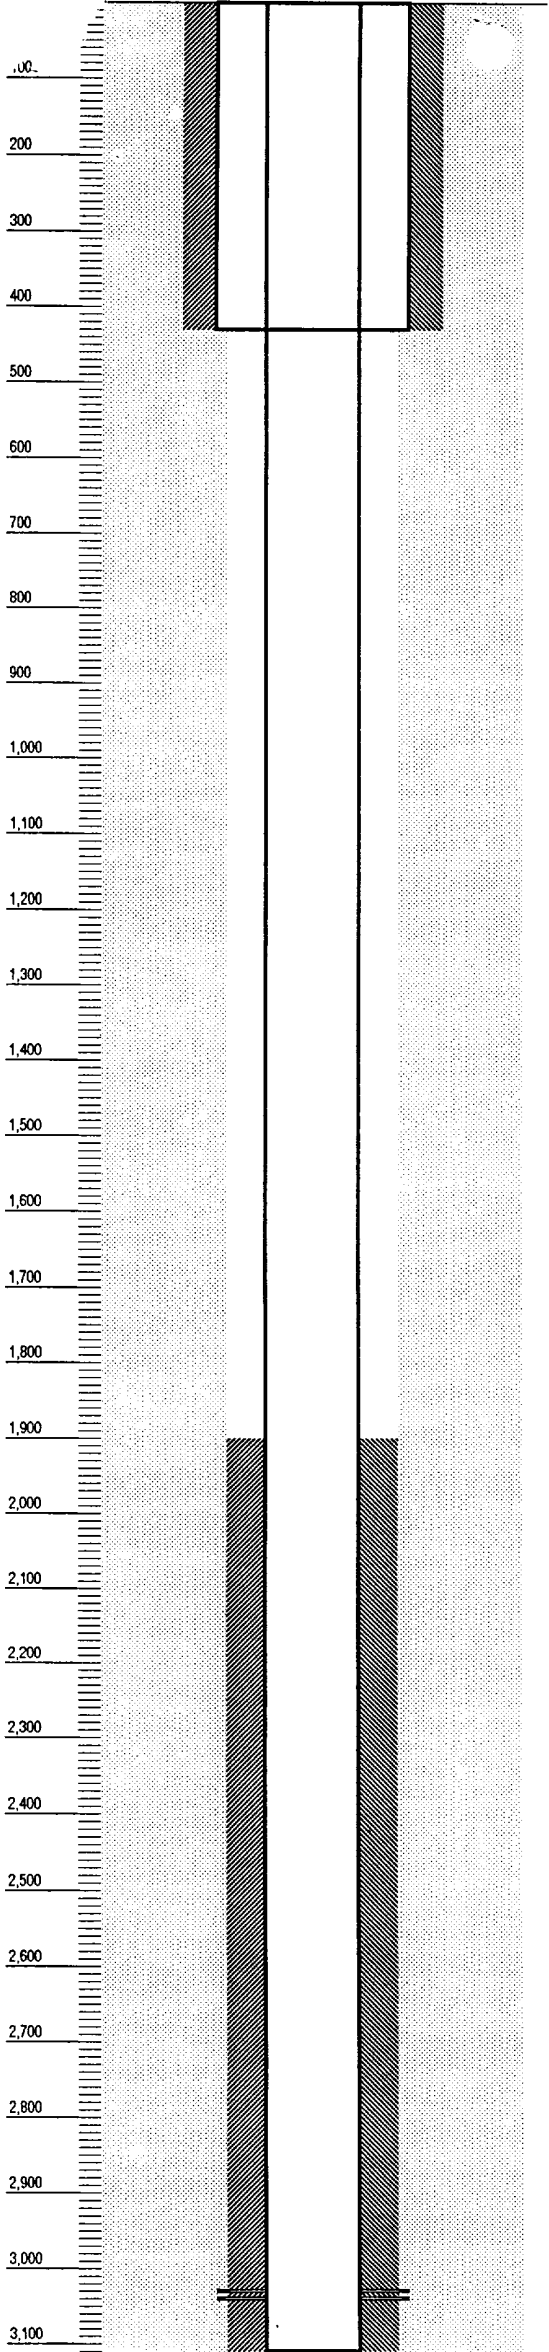

0 to 433 8-5/8", 24#, J-55, ST&C casing cemented with 350 sacks of C + 3% CaCl2, 25 sk circ.

1,547 Top of Salt

1,900 TOC as determined by temperature survey

2,137 Base of salt

3,028 to 3,038 Perforations

0 to 3,108 4-1/2", 14#, J-55, ST&C casing. Cemented with 320 sacks
3,108 Total Depth

THE UNIVERSITY OF CHICAGO
LIBRARY
540 EAST 57TH STREET
CHICAGO, ILL. 60637

RECEIVED

MAY 13 1993