

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE  
(Other instructions  
verse side)

Form approved.  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR Yates Drilling Company	8. FARM OR LEASE NAME Garner Federal
3. ADDRESS OF OPERATOR 207 South 4th Street, Artesia, N.M. 88210	9. WELL NO. 3
LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface Unit G, 1980' FNL & 1980' FEL	10. FIELD AND POOL, OR WILDCAT S.E. Chaves Queen
14. PERMIT NO.	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 34-12S-31E
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 4427' GR	12. COUNTY OR PARISH Chaves
	13. STATE N.M.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF	<input type="checkbox"/>	PULL OR ALTER CASING	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	MULTIPLE COMPLETE	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	ABANDON*	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	CHANGE PLANS	<input type="checkbox"/>
(Other)			

SUBSEQUENT REPORT OF:


WATER SHUT-OFF	<input checked="" type="checkbox"/>	REPAIRING WELL	<input type="checkbox"/>
FRACTURE TREATMENT	<input type="checkbox"/>	ALTERING CASING	<input type="checkbox"/>
SHOOTING OR ACIDIZING	<input type="checkbox"/>	ABANDONMENT*	<input type="checkbox"/>
(Other)			

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

7/2/84 Spudded 12 1/4" hole, 9:00 A.M.  
Ran 10 jts. of 8 5/8" 24# J-55. Casing set at 408'. 1-regular pattern guide shoe set at 408'. Insert float set 369'. Cemented w/ 225 sx. Class "C" 3% CaCl<sub>2</sub> (1/4#/ sack flocele in first 100 sx.) Compressive strength of cement - 1275 PSI in<sup>2</sup> 12 hours PD 12:25 A.M., 7/3/84. Bumped plug 1000 psi, released pressure and float held okay. Cement circulated 50 sx. WOC.


7/3/84 Drilled out at 1:15 P.M. WOC 12 hours and 50 min. Nippled up and tested to 1000# for 30 min, OK. Reduced hole to 7 7/8". Drilled plug and resumed drilling.

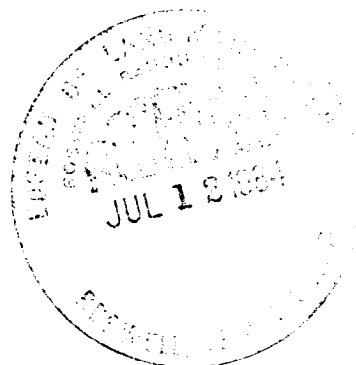

18. I hereby certify that the foregoing is true and correct

SIGNED Peter W. Chester TITLE Production Clerk DATE 7/9/84  
(This space for Federal or State office use)

APPROVED BY PETER W. CHESTER TITLE Production Clerk DATE 7/9/84  
CONDITIONS OF APPROVAL, IF ANY:

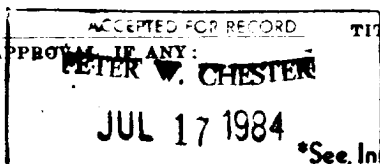

\*See Instructions on Reverse Side

RECEIVED  
JUL 19 1984  
O. C. D.  
ARTESIA, OFFICE

RECEIVED  
JUL 23 1984  
OFF  
HOBBS, CALIF