

6286

REGAN OFFSHORE INTERNATIONAL, INC.

Torrance,

REGAN BLOWOUT PREVENTERS


The Regan Torus Blowout Preventer is used primarily on production and workover rigs for well control up to 2000 PSI working pressure.

DESIGN FEATURES

The Torus Blowout Preventer is designed for minimum weight to facilitate its use with production and workover rigs.

The design of the Torus Blowout Preventer is such that the sealing ability is not affected by wear or damage to the annular seal. The design of the Torus Blowout Preventer is such that the sealing ability is not affected by wear or damage to the annular seal.

The Torus Blowout Preventer increases the sealing ability of the wellhead by providing a positive seal around the wellhead. The Torus Blowout Preventer is designed to provide a positive seal around the wellhead.

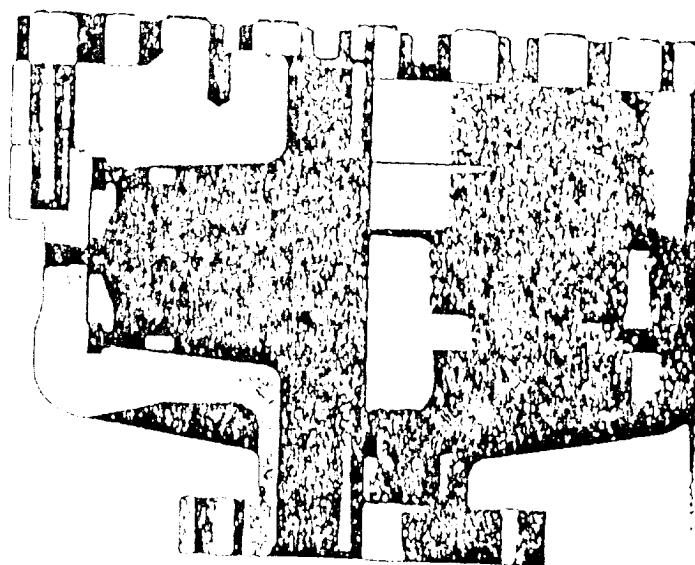

TORUS BLOWOUT PREVENTER
PATENTED

SPECIFICATIONS

Nominal Size	Test Pressure (PSI)	DIMENSIONS (in.)			Weight (LBS.)	End Flanges (in.)	R/NK (in.)	Side (in.)	Bottom (in.)
		Outside Diameter	Flange Face	Flange Height					
4	2000	48.0	48.0	10.0	1000	4.0	4.0	4.0	4.0
6	2000	72.0	72.0	10.0	1500	6.0	6.0	6.0	6.0
8	2000	96.0	96.0	10.0	2000	8.0	8.0	8.0	8.0

C.E. LaRue and B.N. Muncy, Jr.

EXHIBIT "E"
BISON PETROLEUM

RECEIVED
DEC 20 1985
HOBBS OFFICE