

**NEW MEXICO OIL CONSERVATION COMMISSION**  
**WELL LOCATION AND ACREAGE DEDICATION PLAT**

Form C-122  
 Supersedes C-12H  
 Effective 1-1-65

All distances must be from the outer boundaries of the Section


Lessee <b>CONOCO INC.</b>			Lease <b>DEEP WASH</b>		Well No. <b>1</b>
Section <b>11</b>	Township <b>12S</b>	Range <b>30E</b>	County <b>CHAVES</b>		
Locality and Location of Well: 1981 feet from the <b>NORTH</b> line and 1980 feet from the <b>WEST</b> line Producing Formation <b>SWD</b> Pool <b>UNDESIGNATED SAN ANDRES</b> Estimated Acreage <b>3.67</b> Acres					

- 1 Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
- 2 If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
- 3 If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_\_

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) \_\_\_\_\_

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

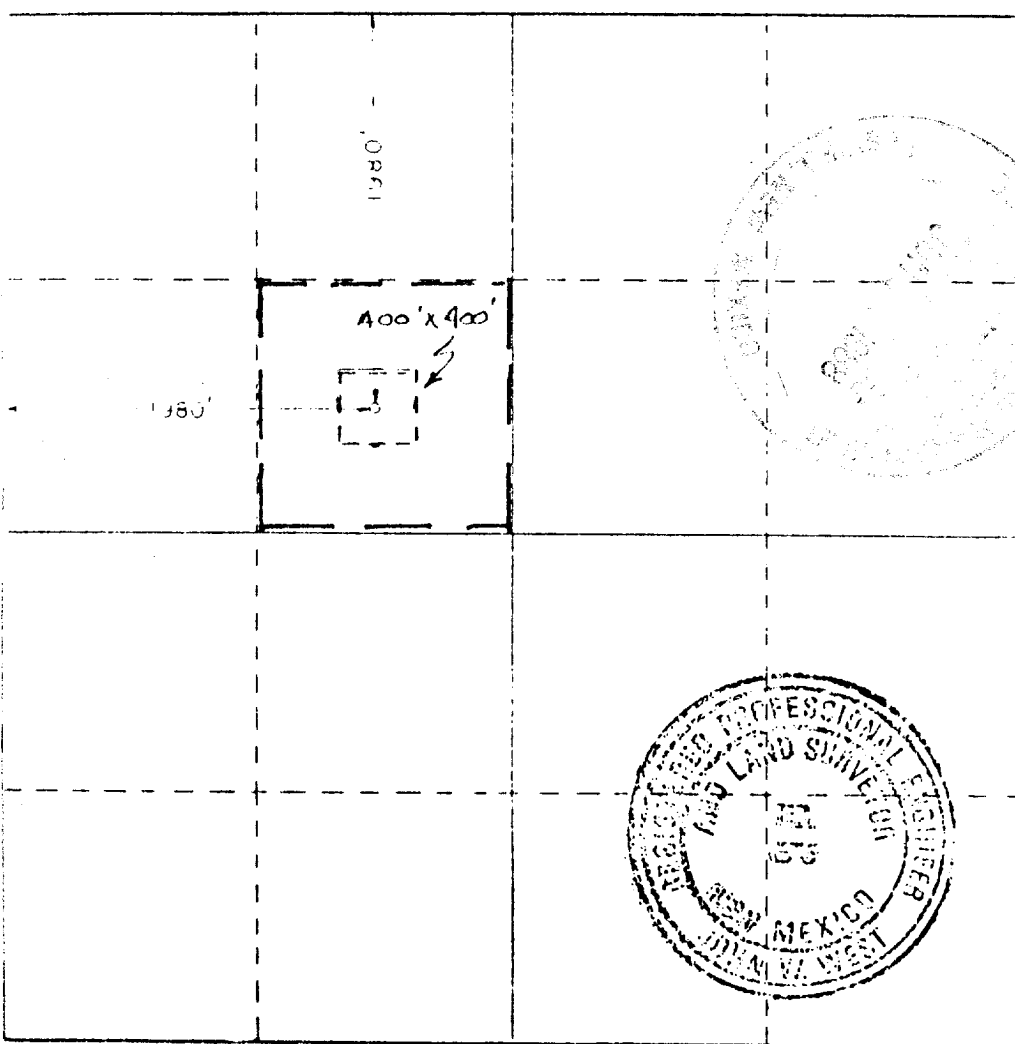


**CERTIFICATION**

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief

\_\_\_\_\_  
 Administrative Supervisor  
**CONOCO INC.**  
 11-14-85

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed  
 11/01/85  
 Registered Professional Engineer and Land Surveyor  
 \_\_\_\_\_  
 Certificate No. **JOHN W. WEST** 676  
**RONALD J. EIDSON** 3239





STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT  
OIL CONSERVATION DIVISION  
HOBBS DISTRICT OFFICE

6-8-88

POST OFFICE BOX 1980  
HOBBS, NEW MEXICO 88241-1980  
(505) 393-6161

*Swd 343*

OIL CONSERVATION DIVISION  
P. O. BOX 2088  
SANTA FE, NEW MEXICO 87501

RE: Proposed:

MC	_____
DHC	_____
NSL	_____
NSP	_____
SWD	<input checked="" type="checkbox"/>
WFX	_____
PMX	_____

Gentlemen:

I have examined the application for the:

<i>Foy &amp; Middlebrook</i>	<i>(Conoco Inc)</i>	<i>Mescalero</i>	<i>Field #1-F</i>	<i>11-12-30</i>
Operator	Lease & Well No.	Unit	S-T-R	

and my recommendations are as follows:

*OK*

---

---

---

---

Yours very truly,

*Jerry Sexton*  
Jerry Sexton  
Supervisor, District 1

/ed

## APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: ☐ Secondary Recovery ☐ Pressure Maintenance ☒ Disposal ☐ Storage  
Application qualifies for administrative approval? ☐ yes ☐ no

II. Operator: FOY AND MIDDLEBROOK

Address: 310 West Texas, Suite 210, Midland, Texas 79701

Contact party: Steven R. Foy Phone: (915) 687-0144

III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.  
see attached sheet.

- IV. Is this an expansion of an existing project? ☐ yes ☒ no  
If yes, give the Division order number authorizing the project \_\_\_\_\_.

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review. Attached

\* VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail. Attached

VII. Attach data on the proposed operation, including: Attached

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

\*VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval. Attached

IX. Describe the proposed stimulation program, if any. Attached

\* X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.) Attached

\* XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken. Attached

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water. Attached

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form. Attached

XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Steven R. Foy Title: General Partner

Signature: Steven R. Foy Date: 6-6-88

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

### III. WELL DATA FOR DISPOSAL WELL

#### A) 1) Lease Name and Well No.

Conoco - Original Operator

Mescalero Federal Well No. 1

Sec. 11, T-12-S, R-30-E (F)

1980' FNL & 1980' FWL of Sec.

Chaves County, New Mexico

#### 2) Casing Record:

<u>Type</u>	<u>Hole Size</u>	<u>Csg. Size</u>	<u>Depth Set</u>	<u>Sks Cmt</u>	<u>Remarks</u>
Surface	16"	13-3/8"	429'	350	Cmt circulated
Intermediate	12-1/4"	9-5/8"	4300'	2113	Cmt circulated

#### 3) Injection Tubing

4100' - 2-7/8", 6.4#/ft., J-55, EUE, Tubing, internally plastic  
coated for salt water disposal service.

- 4) Baker 9-5/8" x 2-7/8", 51B A-3 Lok-Set Packer w/Ball Valve & On-Off  
tool, Double Grip Packer internally coated for salt water disposal  
service to be set at 3950' in 10,000# tension.

#### B) DISPOSAL WELL DATA

##### 1) Injection Formation:

- a) San Andres
- b) The disposal zone is not located in a field productive of oil  
and gas. Therefore, this zone is not located within a known  
pool or field.

##### 2) Injection Interval:

- a) Depth - 4100' - 4120' & 3996' - 4106'

- b) Perforation density - 4 holes/ft.
- c) The zone is currently cemented behind 9-5/8" casing.
- 3) This well was drilled to 10,554' as an exploratory Devonian test. The Devonian was found not to be non-commercial. Following this the well was plugged and abandoned.
- 4) Currently there are no perforated intervals in this well bore. Cement plugs are set in the well bore as follows:
  - (a) Set 85 sk "H" cmt plug from 7670' - 7470'
  - \*b) Set 105 sk "H" cmt plug from 4375' - 4225'
  - c) Set 45 sk "H" cmt plug from 1675' - 1575'
  - d) Set 45 sk "H" cmt plug from 833' - 733'
  - e) Set 20 sk "H" cmt plug from 50' - 0'

\*This plug was checked with a wire line. Top of cement was found at 4231'.
- 5) There are no known zones above or below the proposed disposal zone which are economically productive of oil or gas.



VI. Well Data for Any Well which is located within one-half mile of the proposed disposal well.

1) Lease Name & Well No.

Foy & Middlebrook - Operator

Culp Ranch Unit Well No. 1

990' FNL & 1980' FWL

Sec. 11, T-12-S, R-30-E (C)

Chaves County, New Mexico

2) Date Drilled - Nov. 12, 1987

3) Casing and Cement Record:

<u>Type</u>	<u>Hole Size</u>	<u>Csg. Size</u>	<u>Depth Set</u>	<u>Sks Cmt</u>	<u>Remarks</u>
Surface	17-1/2"	13-3/8"	450	450	Cmt circulated
Inter.	11"	8-5/8"	2980	1450	Cmt circulated
Prod.	7-7/8"	5-1/2"	10251	1180	*see remarks below

\*Two stage cement job - DV Tool@ 6985'

1st stage 200 sks cmt calculated to 8900'

2nd stage 980 sks cmt " " 2500'

4) Total Depth - 10,280'

5) Completion Record

Open Hole 10251 - 280'

Completed Natural

Flow - 480 BOPD, 0 BWPD, Gas TSTM

on 16/64" chk 41.2°API oil FTP 350#

- 6) Attached is a schematic of the Conoco - Mescalero Federal Well No. 1 (F11, 12S, 30E) which is the only other well in the area of review. This well was drilled, never completed, and subsequently plugged and abandoned March 22, 1986. A schematic of the Foy & Middlebrook Culp Ranch Unit No. 1 is also attached.

DATE 5-9-88

PRESENT  
WELL DATA SHEET

Lease Mescalero Federal

Well No. 1

Location 1980' FNL & 1980' FWL, Sec. 11, County Chaves State New Mexico  
T-12-S, R-30-E (F)

K.B. Elev. 4022'


Date Plugged 3-22-86

G.L. Elev. 4003'

Formation(s) All zones non-commercial.

D.F. Elev. 4021'

The primary objective was the Devonian.

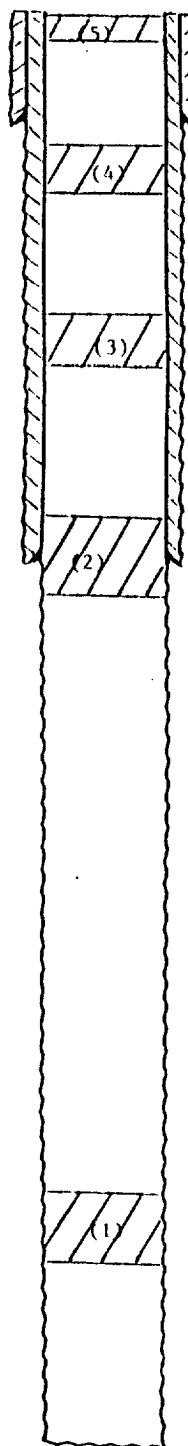

Cut 13-3/8" &amp; 9-5/8" csg off 4' below GL. Weld plate on 13-3/8" &amp; install marker.

Gr. N.A. Thd. ST&amp;C

Set @ 429'

w/ 350 Sks.

Hole Size 16"

Cement circulated.

Tested csg to 600'

Held O.K.

3-22-86

Set Cmt Plugs Set as Follows:

- (1) Set 85 sx "H" cmt plug from 7670' - 7470'
- (2) Set 105 sx "H" cmt plug from 4375' - 4225'. Found top w/wire line at 4231'
- (3) Set 45 sx "H" cmt plug from 1675' - 1575'
- (4) Set 45 sx "H" plug from 833' - 733'
- (5) Set 20 sx "H" plug from 50' - 0'

9-5/8" 36"

Gr. K-55 Thd. LT&amp;C

Set @ 4300

w/ 2113 Sks.

Hole Size 12-1/4"

Cement circulated.

Tested csg to 1040'

Held O.K.

## DST Results

UNDESIGNATED - DEVONIAN - CHAVES COUNTY, NEW MEXICO - 1.0000000

API NUMBER: 30-005-21052

AFE NUMBER: 40-20-4785

D &amp; T Mescalero 11 No. 1 - OBJECTIVE: 10,700' DEVONIAN

LOCATION: 1980' FNL &amp; 1980' FWL OF SECTION 11, T-21S, R-30E

TD: 10,554' FPD: NA RM: NA CL: NA DATE SPUD: 1/14/86

RIG REL: 3/22/86 COMPLETED: P&amp;A FORMATION: DEVONIAN PERFS:

NONE WORK DONE: Ran 13 jts 13-3/8" surface csg. RU Dowell.

Cemented csg w/350 sx class "C" w/42 gel. Returns to surface.

Tested to 600 psi w/no leaks. RU Schlumberger. Logged well

w/GR-DLL-HSFL-CAL &amp; RCT-LDT-CAL-FDC from 4296'-1500' (GR-CAL to

500'). 2nd run w/GR-LSS from 4296'-2200'. Ran 103 jts 9-5/8".

36", K-55 LT&amp;C intermediate csg. RU Dowell. Cmt csg w/1163

class "C" light + 182 amt &amp; 950 sx class "C" + 22 CAC12.

Returns to surface. Tested to 1040 psi w/no leaks. RU

Schlumberger. Logged well w/DLL-HSFL-GR-CAL from 10,483'-4300'

&amp; CML-LDT-FDC-GR-CAL from 10,404'-4300'. 3rd run w/LSS-GR from

8970'-4300'. DST #2: Flopetrol-Johnston 10,222'-10,550'.

Surface performance: Steady increasing blow to 15.37 psi during

IF; increased to 69.45 psi during FF. Drill Pipe Recovery:

AS21' total fluid; slightly oil cut mud. Sample chamber

recovery: Pressure: 40 psi. C.G. Gas: 10.01 C.C. Oil: 520

C.C. Water: 1870 C.C. Mud: 10 Tot. Liq.: 2400 API Gravity:

39.4 at 60°F at 68°F. Drill Pipe Recovery: 486' gas &amp;

Scavenger cut drilling fluid: 2.67 bbls. Total fluid sample

chamber recovery: Pressure: 200 psi DST #3. Baker-Lyness

Testing 10,259'-10,305'. Surface Performance: First flow inc.

to 1.5 oz.; second flow inc. to 31 psi, third flow 21 psi, ran

nitrogen to blow down drill pipe, ran third flow to get fluid to

surface-no pressure data. Drill Pipe Recovery: 640' oil, 5694'

heavy oil cut water; 1500' water. Pit Recovery: 23 BO, 113 BW

Sample Chamber Recovery: Chamber contaminated - not reported.

Set blinded cmt plug from 10,259'-9540' w/410 sx class "H" cmt.

DST #4, no test, p&amp;ra failed. DST #5: Flopetrol-Johnston

9322'-9543'. Surface Performance: Initial flow inc to 81 psi;

second flow inc from 1.37 psi to 4.07 psi; third flow inc from

3.47 psi to 3.81 psi. Drill Pipe Recovery: 60' gas &amp;

scavenger cut drilling fluid: 2.67 bbls total fluid. Sample

Chamber Recovery: Pressure 200 psi. All zones non-commercial.

RU Dowell. Set 85 sx "H" cmt plug from 7670'-7470'. Set 105 sx

class "H" cmt plug from 4375'-4225'. RU wireline &amp; tagged top

of cmt top at 4231'. Set 45 sx class "H" cmt plug from

1675'-1575'. Set 45 sx class "H" cmt plug from 833'-733'. Cut

off 13-3/8" &amp; 9-5/8" csg 4' below GL. Set 50' class "H" surface

plug w/20 sx &amp; 12 CAC12. Welded plate onto 13-3/8" csg &amp; placed

well abandonment marker 4' above GL.

Final Report

Top of Devonian 10,259'

Well P&amp;A. Did not run

prod. csg.

Hole Size 8-3/4"

Plug Back Total Depth Surface


Total Depth 10,554'

Well Name Mescalero Federal No. 1



DATE 5-9-88

## WELL DATA SHEET

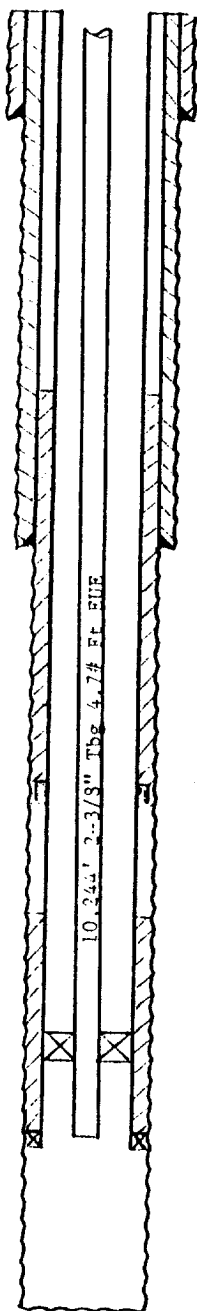Lease Culp Ranch UnitWell No. 1Location 990' FNL & 1980' FWL, Sec. 11, T-12-S, R-30-E County Chaves State New MexicoK.B. Elev. 4024'  
G.L. Elev. 4005.5  
D.F. Elev. 4006Date Completed 11-12-87  
Formation(s) DevonianOpen hole 10,251' - 280'. Completed  
natural, flow 480 BOPD, 0 BWPD,  
Gas TSTM, FTP 350#, 16/64" Chk.  
41.2° API oil.

13-3/8" 48 #  
Gr. N.A. Thd. ST&C  
Set @ 450'  
w/ 450 Sk.  
Hole Size 17-1/2"  
Cement circulated

TOC @ 2500'  
calculated

8-5/8" 24 & 32 #  
Gr. J-55 Thd. LT&C  
Set @ 2980'  
w/ 1450 Sk.  
Hole Size 11"  
Cement circulated

DV tool 6985'

Baker Model "R-3 Double Grip"  
pkr at 10,147'

Top of Devonian 10,240'

5-1/2" 17 #  
Gr. K & N Thd. LT&C  
Set @ 10,251' w/pkr shoe  
w/ 1180 Sk.  
Hole Size 7-7/8"  
Open Hole 10,251 - 282'

DST #1  
10,179-244' No recovery, DST failed.

DST #2  
10,170-282' (Devonian). Rec 9998'  
free oil, no wtr, & 175 bbl 40° grav-  
ity in tank, sampler rec 2255 cc oil  
+ .0325 ft<sup>3</sup> gas, DST No. 2 as follows

IHP	5000#
15 min Preflow	1649# - 2062#
60 min ISIP	4036#
60 min 2nd FP	2319# - 3743#
120 min FSIP	4036#
FHP	5000#
BHT	157°F

Gas & fluid to surface in  
30 mins. after flow  
TOC 8900' calculated

Plug Back Total Depth 10,280'  
Total Depth 10,280'  
Well Name Culp Ranch Unit #1

VII. Data For the Proposed Disposal Well

- 1) Average daily rate 500 BWPD increasing to a maximum daily rate of 4000 BWPD.
- 2) This will be a closed system designed to keep oxygen from entering the SWD well. An oil blanket will be kept in the disposal tank. Automatic kill switch will keep the oil blanket from being pumped down the disposal well.
- 3) Initially the disposal well should be on a vacuum. The maximum pressure will not exceed 2000 PSI.
- 4) There are a number of San Andres disposal wells in Eddy, Lee and Chaves counties, New Mexico. Quite often produced Devonian water is disposed by using these wells. There does not appear to be a major compatibility problem. An analysis of the Devonian water is attached. Also attached is a letter from Martin Water Laboratories Inc. dated May 17, 1988. In this letter it is indicated that the hydrogen sulfide normally found in the San Andres formation could cause minor iron sulfide precipitation. Corrosion in the proposed system should be minimal as it is planned to internally coat the surface line tubing and packer to prevent corrosion. Should iron sulfide be precipitated it can be easily removed by acidizing.
- 5) The disposal of the produced water will be into a zone known to be not productive of oil and gas at or within one mile of the proposed well. A typical water analysis for the San Andres formation is attached.

RECEIVED

JUN 7 1988

OCB  
HOBBS OFFICE



P.O. BOX 1468  
MONAHANS, TEXAS 79756  
PH. 943-3234 or 563-1040

Martin Water Laboratories, Inc.  
WATER CONSULTANTS SINCE 1953  
BACTERIAL AND CHEMICAL ANALYSES

709 W. INDIANA  
MIDLAND, TEXAS 79701  
PHONE 683-4521

May 17, 1988

Mr. Robert Setzler  
4101 Dawn Circle  
Midland, Texas 79701

Re: Bell, Foy & Middlebrook


Dear Mr. Setzler:

The objective of this letter is to evaluate possible compatibility between the Culp Ranch Unit #1 water reported on laboratory #288349 (3-1-88) and San Andres water in the area. Our nearest San Andres records are very distant, ranging from 20-25 miles north and northwest and 25 miles to the northeast; therefore, there is questionable reliability in these records regarding characteristics of San Andres in the area of this Devonian well. However, in making these comparisons, we have identified a single factor that could be of concern. Some of these distant San Andres records have hydrogen sulfide, which could be expected to cause minor iron sulfide precipitation when mixed with this Devonian water. However, if the iron content in this Devonian is ever higher from more corrosion, then this would increase the incompatibility.

In the above we have addressed the possibility of combining these waters on the surface for re-injection. However, we would have no concern regarding the mild incompatibility discussed above if the San Andres were to be injected into the Devonian interval. This is to say that we would not expect this incompatibility to prevent injecting San Andres into the Devonian interval.

We have attempted to give some insight into possible compatibility regarding the waters in question. However, we do feel that if there is any known San Andres in the area of the Graham Springs field, a record should be obtained of this water to establish a more accurate evaluation of compatibilities.

Very truly yours,



Waylan C. Martin

WCM/sn

SAN ANDRES  
WATER ANALYSIS REPORT

Company \_\_\_\_\_ Date Sampled 5-3-88  
 Field Chaveroo County Lea  
 Lease \_\_\_\_\_ State New Mexico  
 Well \_\_\_\_\_ Formation San Andres  
 Type of Water Produce Water, B/D \_\_\_\_\_  
 Sampling Point Well Head Sampled By \_\_\_\_\_

DISSOLVED SOLIDSOTHER PROPERTIES

<u>CATIONS</u>	mg/l	meq/l	pH <u>5.2</u>
Sodium, Na+(Calc)	<u>60743</u> ÷ 23	<u>2641</u>	Specific Gravity
Calcium, Ca++	<u>28400</u> ÷ 20	<u>1420</u>	<u>1.140</u>
Magnesium, Mg++	<u>6561</u> ÷ 12.2	<u>538</u>	H <sub>2</sub> S <u>Positive</u>
Barium, Ba++	<u>Neg.</u> ÷ 68.7	<u>-0-</u>	Total Dissolved Solids
Iron, Fe (Total)	<u>4</u>		<u>259076</u>
_____	_____	_____	Total Hardness
_____	_____	_____	<u>98000</u>

ANIONS

Chloride, Cl-	<u>163000</u> ÷ 35.5	<u>4592</u>
Sulfate, SO <sub>4</sub> =	<u>250</u> ÷ 48	<u>5</u>
Carbonate, CO <sub>3</sub>	<u>0</u> ÷ 30	<u>0</u>
Bicarbonate, HCO <sub>3</sub>	<u>122</u> ÷ 61	<u>2</u>
_____	_____	_____

VIII. GEOLOGIC DATA FOR DISPOSAL ZONES

Name: Lower San Andres

Depth: 3996' - 4106'

Thickness: 10'

Lithology: Dolomite: Light Brown - Tan, very fine crystalline

Porosity: (Density/Neutron Crossplot) 16 - 18%

Resistivity: 5 - 10 ohms - 100% salt water

Depth: 4100 - 4122'

Thickness; 22'

lithology: Sandstone: clear - frosted, very fine to fine-grain,  
rounded to subrounded.

Porosity: (Density Neutron Crossplot) 22 - 24%

Resistivity: 1 ohm - 100% salt water

The Ogallala appears to be the only source of potable ground water in this area. Depth to groundwater in the Ogallala does not exceed 500 feet in this area. There are no known sources of drinking water below the injection interval.

IX. PROPOSED STIMULATION TREATMENT:


- 1) Remove marker. Cut plate off 9-5/8" casing. Install well head.
- 2) Drill out the following cmt plugs, using drill collars, bit casing scraper and 3-1/2" work string.
  - a) 0 - 50'
  - b) 733' - 833'
  - c) 1575' - 1675'
- 3) Pressure test 9-5/8" csg and cmt plug from 4375'-4225' to 2000#. If system holds pressure proceed to step 4. If it does not hold pressure, set CIBP @ 4200' & cap w/10' cmt POH w/work string and BHA.
- 4) Run correlation log & perf 3996' - 4106' & 4100' - 4122' w/2 jet shot/foot.
- 5) Run work string and RTTS pkr. Acidize intervals 3996' - 4106' and 4100' - 4122' w/2500 gal 15% NEFE acid. Establish injection rate. If rate is less than 2 BPM on a vacuum proceed to step No. 6.
- 6) Frac well with 15,000 gal Gel carrying 21,300# 20-40 mesh sand at 15 BPM at 2000# WHP.
- 7) POH w/work string & RTTS pkr. RIH w/plastic coated 2-7/8" tbg and plastic coated Baker 51B-A3 Lok-Set csg pkr for 9-5/8" csg. Set pkr at 3950' in 10,000# tension.
- 8) Fill annulus w/inhibited 2% KCL wtr. w/gage at surf to monitor csg press. & second gage to monitor disposal tbg. pressure.
- 9) Install well head. Place well on disposal service.
- 10) See attached well bore schematic.



RECEIVED

JUN 7 1988

OCD  
HOBBS OFFICE

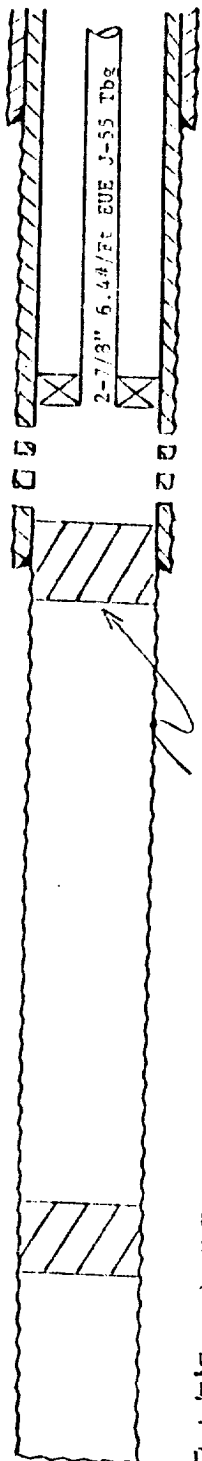DATE 5-9-88PROPOSED  
WELL DATA SHEETLease Mescalero FederalWell No. 1Location 1980' FNL & 1980' FWL, Sec. 11,  
T-12-S, R-30-ECounty ChavesState New MexicoK.B. Elev. 4022'Date June - 1988G.L. Elev. 4003'Formation(s) San AndresD.F. Elev. 4021'

13-3/8" N.A. #

Gr. N.A. Thd. ST&amp;C

Set @ 429'

w/ 350 Sk.

Hole Size 16"

Cement circulated

Tested csg to 600'

Held O.K.

Baker Model A-3 Lok-Set

Proposed San Andres perf.  
3996'-4106' & 4100'-4122'

9-5/8" 36 #

Gr. K-55 Thd. LT&amp;C

Set @ 4300'

w/ 2113 Sk.

Hole Size 12-1/4"

Cement circulated

Tested csg to 1040'

Held O.K.

105 sx "H" cmt plug  
from 4375' - 4225'  
Found top of plug  
w/wire line at 4231'85 sx "H" cmt plug  
from 7670' - 7470'

Top of Devonian 10,259'

Well P&A Did not run  
prod. csg.

Hole Size 8-3/4"

Proposed San Andres Disposal Zone:

Perf: 3996'-4016' & 4100'-4122'  
(2 jet/ft)Treatment: Acidize w/2500 gal. 15%  
acid. Establish inj. rate  
if necessary frac w/15,000  
gal Gel containing 21,300#  
snd.NOTE: Tbg & Pkr plastic coated for  
corrosion. Annulus (9-5/8 x  
2-7/8") filled w/inhibited  
csg pack fluidPlug Back Total Depth 4231'Total Depth 10,554'Well Name Mescalero Federal #1

- X. Logs have been submitted to the NMOCC for this well in October 1986 and are now a part of the public record. Formation tops for well are as follows:

MESCALERO FEDERAL NO. 1

KB 4022

Anhydrite	1690	(+2332)
Yates	2372	(+1650)
San Andres	2840	(+1182)
Tubb	5678	(-1656)
Abo	6500	(-2478)
Base of Abo	6950	(-2928)
Wolfcamp	7600	(-3578)
Cisco	8188	(-4166)
Canyon	8520	(-4498)
Strawn	8922	(-4900)
Atoka	9250	(-5228)
Mississippian	9580	(-5558)
Woodford	10235	(-6213)
Devonian	10259	(-6237)
Total Depth	10550	(-6528)

None of the zones were found to be commercially productive of oil or gas

- XI. A chemical analysis for fresh water is attached.
- XII. All available data have been examined and there is no evidence that open faults or other hydrologic connection exists between the disposal zone and any underground source of drinking water.
- XIII. A copy of proof of notice is attached.

P. O. BOX 1468  
MONAHANS, TEXAS 79756  
PH. 943-3234 OR 563-1040

**Martin Water Laboratories, Inc.**

709 W. INDIANA  
MIDLAND, TEXAS 79701  
PHONE 683-4521

## RESULT OF WATER ANALYSES

TO: Bell, Foy & Middlebrook  
310 West Texas, Suite 210, Midland, TX

LABORATORY NO. 588199  
SAMPLE RECEIVED 5-23-88  
RESULTS REPORTED 5-24-88

COMPANY Bell, Foy & Middlebrook LEASE Culp Ranch Unit  
FIELD OR POOL Graham Springs  
SECTION 11 BLOCK        SURVEY T-12S & R-30E COUNTY Chaves STATE NM

SOURCE OF SAMPLE AND DATE TAKEN:

NO. 1 Ogallala water - taken from windmill 1/2 mile north of Culp Ranch Unit #1. 5-21-88

NO. 2 Ogallala water - taken from windmill 3/4 mile northwest of Culp Ranch Unit #1. 5-21-88

NO. 3 \_\_\_\_\_

NO. 4 \_\_\_\_\_

## REMARKS:

CHEMICAL AND PHYSICAL PROPERTIES				
	NO. 1	NO. 2	NO. 3	NO. 4
Specific Gravity at 60° F.	1.0020	1.0028		
pH When Sampled				
pH When Received	7.36	9.77		
Bicarbonate as HCO <sub>3</sub>	173	83		
Supersaturation as CaCO <sub>3</sub>				
Undersaturation as CaCO <sub>3</sub>				
Total Hardness as CaCO <sub>3</sub>	168	95		
Calcium as Ca	48	27		
Magnesium as Mg	11	7		
Sodium and/or Potassium	6	87		
Sulfate as SO <sub>4</sub>	25	113		
Chloride as Cl	9	21		
Iron as Fe	0.48	0.24		
Barium as Ba				
Turbidity, Electric				
Color as Pt				
Total Solids, Calculated	273	378		
Temperature °F.				
Carbon Dioxide, Calculated				
Dissolved Oxygen, Winkler				
Hydrogen Sulfide	0.0	0.0		
Resistivity, ohms/m at 77° F.	34.00	18.00		
Suspended Oil				
Filtrable Solids as mg/l				
Volume Filtered, ml				
Carbonate, as CO <sub>3</sub>	0	41		

Results Reported As Milligrams Per Liter

Additional Determinations And Remarks The undersigned certifies the above to be true and correct to the best of his knowledge and belief.

**AFFIDAVIT OF PUBLICATION**

County of Chaves }  
State of New Mexico, }

I, Jean M. Pettit,

Manager

Of the Roswell Daily Record, a daily newspaper published at Roswell, New Mexico, do solemnly swear that the clipping hereto attached was published once a week in the regular and entire issue of said paper and not in a supplement thereof for a period

of once

weeks

beginning with the issue dated 31

May, 1988

and ending with the issue dated 31

May, 1988

Jean M. Pettit  
Manager

Sworn and subscribed to before me

this 31st day of

May, 1988

Marylou S. Shaver  
Notary Public

My commission expires

July 21, 1990  
(Seal)

Publish May 31, 1988

**PROOF OF NOTICE**

Foy and Middlebrook, 310 West Texas, Suite 210, Midland, Texas 79701, Phone (915) 687-0144, Mr. Steven Foy, owner, has applied to the State of New Mexico Energy, Minerals & Natural Resource Department for a permit to dispose of produced water into a formation not productive of oil and gas. It is proposed to convert the Mescalero Federal No. 1 into a salt water disposal well. This well is located 1980' FN&WL (F) Sec. 11, T-12-S, R-30-E, Chaves County, New Mexico. Injection will be into perforations from 3996' to 4122' into the lower San Andres formation. Initial injection pressure is anticipated to be 0# with the maximum pressure not to exceed 2000#. Should anyone object, please file your objection with the NMOCC, P.O. Box 2088, Santa Fe, New Mexico 87501 within 15 days after this notice has been published.

Foy and Middlebrook, 310 West Texas, Suite 210, Midland, Texas 79701, Phone (915) 687-0144, Mr. Steven Foy, proposes to convert the Mescalero Federal No. 1 into a salt water disposal well. This well is located 1980' FN&WL (F) Sec. 11, T-12-S, R-30-E, Chaves County, New Mexico. Injection will be into perforations from 3996' to 4122' into the lower San Andres formation. Initial injection pressure is anticipated to be 0# with the maximum pressure not to exceed 2000#. Should anyone object, please file your objection with the NMOCC, P. O. Box 2088, Santa Fe, New Mexico 87501 within 15 days after this notice has been published.

**RECEIVED**

**JUN 7 1988**

**OCD  
HOBBS OFFICE**