

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

U. S. CL. COMM. 77
P. O. BOX 1210
HOUSTON, TEXAS 77240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other Dry

2. Name of Operator

McCLELLAN OIL CORPORATION

3. Address and Telephone No.

P O DRAWER 730, ROSWELL, NM 88202-0730 (505) 622-3200

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1548' FNL & 845' FWL SEC. 6-T11S-R31E, N.M.P.M.

5. Lease Designation and Serial No.

NMNM-63755

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

BRANEX FED. NO. 1

9. API Well No.

30-005-21126

10. Field and Pool, or Exploratory Area

WILDCAT (96038)

11. County or Parish, State

CHAVES, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☒ Final Abandonment Notice

TYPE OF ACTION

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

7-28-94: Plugged to abandon as per verbal with BLM in Roswell. Cemented using Halliburton.

1st Plug	10,636' - 10,486'	45 sx "H" cement
2nd Plug	7,865' - 7,715'	45 sx "H" cement
3rd Plug	5,770' - 5,620'	45 sx "C" cement
4th Plug	3,050' - 2,900'	60 sx "C" cement with 2% CaCl.
Tagged cement at 2,900'.		
5th Plug	400' - 300'	30 sx "C" cement
6th Plug	60' - Surface	20 sx "C" cement.

Jetted pits and released rig.

14. I hereby certify that the foregoing is true and correct

Signed Mark M. Clellan


Title President

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

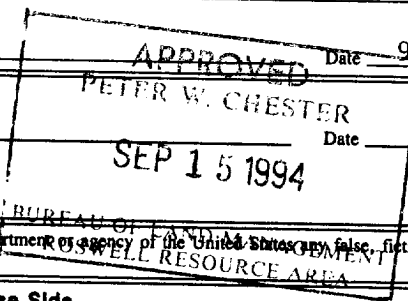

Date 9-13-94

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side