

OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

Miscellaneous Reports on Wells

RECEIVED

JAN 24 1951

OIL CONSERVATION COMMISSION
HOBBS OFFICE

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL	<input checked="" type="checkbox"/>		

January 22, 1951

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Amarada Petroleum Corporation

State of N.M.

Well No. 1

in the

Company or Operator

Lease

G/SE/4 NE/4

of Sec.

11

T.

12-S

R.

33-E

N. M. P. M.

Bagley-Siluro/Devonian

Field

Lea

County.

The dates of this work were as follows:

January 17, 1951

Notice of intention to do the work was ~~submitted~~ submitted on Form C-102 on January 16,

1951

and approval of the proposed plan was ~~obtained~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

11,140' - Total Depth - Line. Ran Schlumberger's Electrical & Gamma Ray Surveys. Spotted 35 sacks cement from 11140' to 11080', 35 sacks from 8030' to 8700', 25 sacks from 3930' to 3843', 25 sacks from 1430' to 1348'. Cut off 4-5/8" casing at 515' and recovered same. Spotted 50 sacks of cement from 350' to 288' and dumped 10 sacks cement in top of 13-3/8" surface casing and set a piece of 4" Line Pipe, cemented in center of surface casing, extending 5' above surface of the ground. Heavy mud between all of the above plugs.

Witnessed by K. V. Stephenson

Name

Amarada Petroleum Corporation

Company

Foreman

Title

Subscribed and sworn before me this

I hereby swear or affirm that the information given above is true and correct.

22nd

day of January

1951

Name



Position Assistant District Superintendent

Representing Amarada Petroleum Corporation

Company or Operator

My commission expires 10-11-54


Address Drawer D, Monument, New Mexico

Remarks:

APPROVED

JAN 26 1951

Date

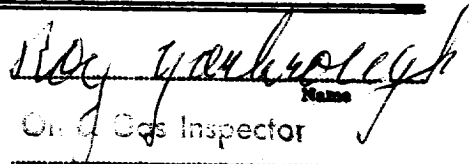

On-Call Inspector

Title

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000