


DUPLICATE

OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

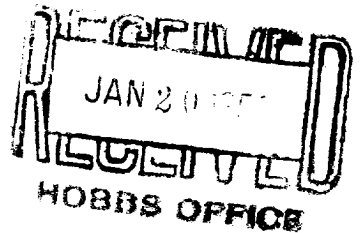

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL		REPORT ON SETTING CASING	X

January 18, 1950

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Amarada Petroleum Corporation

State BTE

Well No. 1

in the

Company or Operator

Lease

C/SE/4 SW/4

of Sec. 23

T. 12-S

R. 33-E

N. M. P. M.,

Wildcat

Field,

Lea

County.

The dates of this work were as follows: January 17, 1950

Notice of intention to do the work was ~~(insert)~~ submitted on Form C-102 on January 16, 1950 and approval of the proposed plan was ~~(insert)~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

3870' - Total Depth - Line. Ran 93 joints 8-5/8" O.D. 32#, J-55, Spang, S.S. Csg. (New) and set at 3870'. Cemented with 1000 sacks Long Horn Reg. Cement mixed 3% Jell, 450 sacks El Toro Reg. & 50 sacks Incor Quick set cement. Plug pumped to 3795' at 8:00 A.M. 1-17-50. Maximum pump pressure 1000#. Ran Temperature Survey. Found top of Cement - Top cement at 1130' Outside of 8-5/8" Csg. Calculated fill 6391', Actual fill 2740', Ratio of Actual to Calculated fill 42.8%

Witnessed by C.E. Telge

Amarada Petroleum Corporation

Farm Boss

Name

Company

Title

Subscribed and sworn before me this

I hereby swear or affirm that the information given above is true and correct.

18th day of January 1950

Name

Position

Assistant District Superintendent

Representing

Amarada Petroleum Corporation

Company or Operator

My commission expires 10-24-53

Address

Drawer D, Monument, New Mexico

Remarks:

APPROVED

JAN 19 1950

Date

Ray Garber
Oil & Gas Inspector
Name
Title

