

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

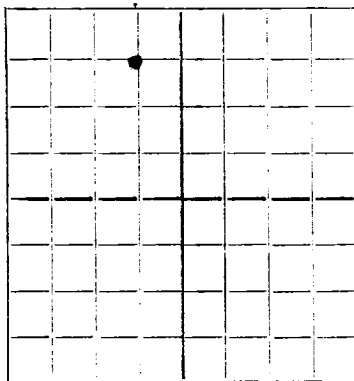
## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico7/16/38OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

**Tide Water Assoc Oil Company State "L"** Well No. 1 in N1/4 of N1/4Company or Operator Lease  
of Sec. 23, T. 12, R. 36, N. M. P. M., Tatum Field, Lea County.AREA 640 ACRES  
LOCATE WELL CORRECTLYThe well is 660 feet EX [S.] of the North line and 1980 feet  
[E.] EX of the West line of Section 23-12-36

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_ Assignment No. 1027

If patented land the owner is \_\_\_\_\_

Address \_\_\_\_\_

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Tide Water Associated Oil CompanyAddress Box 731, Tulsa, Okla.We propose to drill well with drilling equipment as follows: Rotary & Cable Tool

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Tide Water Carries Blanket Bond Of \$10,000 With US Fidelity And Guaranty Co. As Security.

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
<u>17</u>	<u>13"OD</u>	<u>50</u>	<u>SH</u>	<u>275</u>	<u>Cemented</u>	<u>200</u> <i>to surface</i>
<u>11</u>	<u>8-5/8"OD</u>	<u>32</u>	<u>SH</u>	<u>3000</u>	<u>"</u>	<u>150</u>

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 5000 feet.

Additional information: 13"OD Casing will be set at least 15' in the red bed formation and cemented w/200-sacks cement. 8-5/8"OD Casing will be set in anhydrite below salt and cemented w/150-sacks cement. If oil should be found in commercial quantities, either 5 1/2"OD or 6-5/8"OD New Casing will be set above oil formation and sufficient cement used to cement back to bottom of 8-5/8" OD Casing.

Approved \_\_\_\_\_ 19\_\_\_\_\_  
except as follows:

Sincerely yours,

Tide Water Associated Oil Company

Company or Operator

By Elmer Lamb - J. P.Position Prod. Sup't.

Send communication regarding well to

Name Elmer LambAddress Drawer KK, Hobbs, New Mexico.

OIL CONSERVATION COMMISSION

By Ross Walker R. M.Title Oil & Gas Inspector

JUL 18 1938

CONFIDENTIAL

CONFIDENTIAL  
EXCLUDED FROM AUTOMATIC  
DOWNGRADING AND  
DECLASSIFICATION  
PROCESS

CONFIDENTIAL