

NEW MEXICO OIL CONSERVATION COMMISSION


NOTICE OF INTENTION TO DRILL

See Rules 101 and 1104.

If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Hobbs, New Mexico

Place

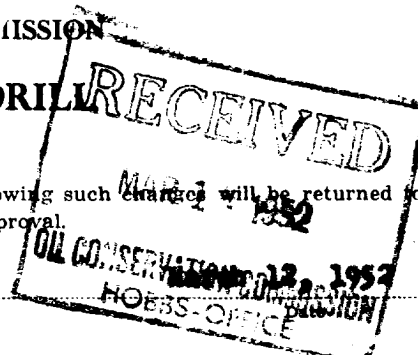

Notice hereby is given that it is our intention to commence the drilling of a well to be known as

Stanolind Oil and Gas Company

Lois Wingerd

well No. 4

in 34/4

Company or Operator

Lease

of Sec. 23, T. 12-S, R. 37-E, N. M., P. M. Gladolia, Pool, Lea County.

The well is 660 feet from (N) (S.) line and 1980 feet from (E.) (W.) line of the above section.

(Give location from section lines. Cross out wrong directions.)

If state land the oil and gas lease is No. Assignment No.

If patented land the owner is Lois Wingerd

Address Brownfield, Texas


If government land the permittee is

Address

The lessee is Stanolind Oil and Gas Company

Address Box 66 - Hobbs, New Mexico

We propose to drill well with drilling equipment as follows: Rotary tools to total



AREA 640 ACRES

LOCATE WELL CORRECTLY

depth.

The status of a bond for this well in conformance with Rule 101 of the General Rules and Regulations of the Commission is as follows: On file with the Commission.

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17 1/2"	13-3/8"	36 1/2	New	300'	Cemented	500 sacks circulated
12"	9-5/8"	32.3 - 40 1/2	New	4600'	Cemented two stages*	1st stg. 400 sacks 8 1/2 gal 100 sacks neat 2nd stg 100 sacks neat
8-3/4"	7"	23 1/2 - 29 1/2	New	9700'	Cemented	150 sacks 4 1/2 gal plus 150 sacks neat

If changes in the above plans become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 9026 feet.

Additional information: *To be two-stage cemented with staging collar set at top of salt, approx. 2300'. To isolate salt section from approx 2300' to 2800'. First stage based on 75% fill.

** 150% calculated amount to bring cement 500' above Wolfcamp.

Approved _____, 19____

except as follows:

Stanolind Oil and Gas Company

Company or Operator

By

Ralph L. Hendrickson

Position

Send communications regarding well to:

Name Ralph L. Hendrickson

Address Box 66 - Hobbs, New Mexico

By

Title

OIL CONSERVATION COMMISSION

